

Journal of Visualized Experiments

Direct Imaging of Laser-driven Ultrafast Molecular Rotation

--Manuscript Draft--

Manuscript Number:	JoVE54917R4
Full Title:	Direct Imaging of Laser-driven Ultrafast Molecular Rotation
Article Type:	Methods Article - JoVE Produced Video
Keywords:	femtochemistry; ultrafast phenomena; coherent control; velocity-map imaging; Coulomb explosion imaging; pump-probe experiment; rotational wavepacket; intense laser field; molecular dynamics; molecular alignment; femtosecond laser; molecular physics
Manuscript Classifications:	92.25.37: physical chemistry; 93.35.32: ion mass spectrometers; 93.36.28: short pulsed lasers; 97.72.23: molecular beams; 97.72.27: molecular physics; 97.72.32: photon interactions with atoms and molecules
Corresponding Author:	Kenta Mizuse, Ph.D. Tokyo Institute of Technology Meguro, Tokyo JAPAN
Corresponding Author Secondary Information:	
Corresponding Author E-Mail:	mizuse@chem.titech.ac.jp
Corresponding Author's Institution:	Tokyo Institute of Technology
Corresponding Author's Secondary Institution:	
First Author:	Kenta Mizuse, Ph.D.
First Author Secondary Information:	
Other Authors:	Romu Fujimoto Nobuo Mizutani Yasuhiro Ohshima, Doctor of Science
Order of Authors Secondary Information:	
Abstract:	<p>We present a method for visualizing laser-induced ultrafast molecular rotational wavepacket dynamics. We have developed a new 2-dimensional Coulomb explosion imaging setup, in which the hitherto impractical camera angle is realized. In our imaging technique, diatomic molecules are irradiated with a circularly polarized strong laser pulse. The ejected atomic ions are accelerated perpendicularly to the laser propagation, and the ions lying in the laser polarization plane are selected through the use of a mechanical slit, and imaged with a high throughput 2-dimensional detector installed parallel to the polarization plane. Because a circularly polarized (isotropic) Coulomb exploding pulse is used, the observed angular distribution of the ejected ions directly corresponds to the squared rotational wavefunction at the time of the pulse irradiation. To create a real-time movie of molecular rotation, the present imaging technique is combined with a femtosecond pump-probe optical setup, in which the pump pulses create unidirectionally rotating molecular ensembles. Owing to the high image throughput of our detection system, the pump-probe experimental condition can be easily optimized by monitoring a real time snapshot. As a result, the quality of the observed movie is sufficiently high for visualizing the detailed wave nature of motions of interests. We also note that the present technique can be implemented in existing standard ion imaging setups, offering a new camera angle or viewpoint for the molecular systems without further extensive modification.</p>
Author Comments:	Please set me and Prof. Ohshima, the last author of the manuscript to corresponding authors. Prof. Ohshima is the professor of two institute and then, two corresponding authors are better to be indicated.

Additional Information:	
Question	Response
If this article needs to be "in-press" by a certain date, please indicate the date below and explain in your cover letter.	



Tokyo Institute of Technology

Department of Chemistry, School of Science

Tokyo, 152-8550, Japan

Sep. 7, 2016

Dear Dr. Jaydev Upponi and Dr. Benjamin Werth
Editors of the Journal of Visualized Experiments

Thank you for the reply and editorial comments on our manuscript,
JoVE54917 "Direct Imaging of Laser-driven Ultrafast Molecular Rotation".

Following Editorial and reviewer's comments, we have modified the manuscript.
The followings are the replies to the comments.

Because both reviewers recognize the novelty of the present method, and the Review 1 agree to the submission to JoVE after the minor revision, we hope the present version satisfy the standard of JoVE publication.

Editorial comments:

•Many errors in English remain in the manuscript. Additional editing is required prior to acceptance, should be performed by a Native English speaker. Some specific errors are noted below:

- Line 60 – “of motions of interests”
- Line 77 – “motionusing”
- Line 78 – “have led” – should be “has”
- Line 103 – “seriously low” – “Seriously” is the wrong word
- Line 124, 213, 295, 740 – “equipments” or “equipment’s”
- 1.5.7 – “a standard mounting procedures”
- 2.2.2 – “passthrough”
- 2.4.2 – “polarizedsecond”
- 2.5 – “each pulses”

We are sorry for the typo and some errors due to the unexpected work of Word program. We have carefully checked the manuscript, and all the above mentioned errors have been fixed.

- Additional detail is required:

-2.3.1 – How are the pulses obtained? Is there a particular readout to watch? Is a laser turned on? Please describe for filming.

New NOTE was added to clarify the origin of the pulse.

-2.3.2 –How are they aligned parallel (are some parts of the apparatus adjusted to achieve this)? Please describe what actions are being performed for filming.

A sentence and NOTE which describe the detail were inserted in the 2.3.2.

-2.5.1 note – Please clarify “the purpose of two pumps”.

- Formatting: 2.4.3/2.5 – There is a heading for 2.5 at the end of this step, plus an additional 2.5 heading below it.

Both of them were errors to be deleted. We fixed them.

- Visualization: The protocol is discontinuous. Please highlight 4.2.2 and 4.5.3.2, which appear to be important for success of the protocol. Make sure that all steps required for success of the protocol are highlighted for filming (excepting computational steps).

We highlighted the steps you suggested.

- Results: Please provide scale bars in Figure 5.

The scale bar is in the top-right of the figure. The second column is also scaled in the polar plot. The third cannot be scaled, because they are schematics as indicated in the caption.

- JoVE reference format requires that the DOIs are included, when available, for all references listed in the article. This is helpful for readers to locate the included references and obtain more information. Please note that often DOIs are not listed with PubMed abstracts and as such, may not be properly included when citing directly from PubMed. In these cases, please manually include DOIs in reference information.

DOI info are now included.

Please include a line-by-line response letter to the editorial and reviewer comments along with the resubmission.

Reviewer 1:

>> I especially like the expanded discussion on how the "time zero" of this experiment is achieved

We added detailed NOTE in 2.5.1 to clarify this.

Major Concerns:

1. Other 3D techniques should be cited such as Vallance and co-workers and Li and co-workers in the introduction.

We added all the important reference as recommended.

Minor Concerns:

2. Section 2 - Construction of the optical set-up; it would be helpful to describe the types of optics used (such as are the beamline mirrors all metallic or dichroic high reflectors). Nothing more than a sentence is needed on this.

3. More information regarding the optical set-up could be provided. For example, the NLC (Non-linear Crystal) material + thickness + cut and importantly the conversion efficiency should be added. Additionally, some samples of the laser power along different parts of the beam would also be instructive. Many of these could be simple additions added to Figure 3, or a few extra lines of text.

In section 2, the types of optics and NLC are indicated and some of them are listed in the materials list.xls. Laser pulse energy is shown through the section 2.

4. Do they use any additional pulse control to remove any chirp introduced from the beam line? Or is the pulse pre-chirped for highest power or temporal pulse duration at the experiment?

5. The authors should state their cross correlation of their three beams as this limits the ultimate temporal resolution

The new sentences and NOTE have been added in the 2.5.6 to address the above two comments.

6. What are the rotational levels of N₂ are present in the ensemble in the molecular beam? And what is its rotational period?

We added descriptions for this in 1.8, 4.2.3, and 4.5.4.

7. What causes their laser stability issues? Is it vibrations through the table or thermal effects changing the laser pointing? It is worth mentioning for readers who are interested in building a similar set-up.

Some details on the laser stability are given in the Discussion section.

Reviewer 2:

>>(1) their protocol contains many very detailed instructions, some indeed very important for proper implementation of the technique, but many others completely meaningless,...

>>(2) their protocol provides a detailed description of the methods that they use in the laboratory, but more of than not, fails to describe the reason for a certain action. That makes the protocol more difficult to follow and less useful than it should be. For example, in 1.2 the authors write "Attach the pulsed valve to the chamber partition using four threaded posts (15 cm, diameter 12 mm),...

Most of the suggested points relate to the NOTE added to follow the Editorial comment for previous revisions. We agree with the reviewers comment "but meaningless (and more than likely, wrong) for similar setups that other researchers would put together, unless their setup becomes an exact clone of the setup used by the authors", but we also have to describe details on apparatus in order to clarify what we actually built up. Therefore, we added many comments and NOTES throughout the manuscript to notify the essence of the procedures and meaning of details.

>>In order for the protocol to possibly become such a useful resource, I think it is essential that the authors alter the scope of the protocol, limiting the protocol to the novel aspects of the method that they have developed

Following the editorial policy of JoVE, we think limiting the procedure description is not suitable and then, we just added comment on the specificity of the present manuscript and the notification of the readers who would like to use the present method.

We hope this modified manuscript is satisfactory for the editor and reviewers.

Sincerely,

Kenta Mizuse, Ph.D.

Assistant Professor

Department of Chemistry,

Tokyo Institute of Technology

Yasuhiro Ohshima, Dr.Sc.

Professor

Department of Chemistry,

Tokyo Institute of Technology

TITLE:**Direct Imaging of Laser-Driven Ultrafast Molecular Rotation****AUTHORS:**

Mizuse, Kenta
Department of Chemistry
Tokyo Institute of Technology
Tokyo, Japan
mizuse@chem.titech.ac.jp

Fujimoto, Romu
Department of Chemistry
Tokyo Institute of Technology
Tokyo, Japan
fujimoto.r.ab@m.titech.ac.jp

Mizutani, Nobuo
Equipment Development Center
Institute for Molecular Science
Okazaki, Japan
nmizutan@ims.ac.jp

Ohshima, Yasuhiro
Department of Chemistry
Tokyo Institute of Technology
Tokyo, Japan
Department of Photo-molecular Science
Institute for Molecular Science
Okazaki, Japan
ohshima@chem.titech.ac.jp

CORRESPONDING AUTHOR:

Kenta Mizuse (mizuse@chem.titech.ac.jp), Yasuhiro Ohshima (ohshima@chem.titech.ac.jp)

KEYWORDS:

femtochemistry, ultrafast phenomena, coherent control, velocity-map imaging, slice imaging, pump-probe experiment, rotational wave packet, intense laser field, molecular dynamics, molecular alignment, femtosecond laser, molecular physics

SHORT ABSTRACT:

We present a protocol for creating a real-time movie of a molecular rotational wave packet using a high-resolution Coulomb explosion imaging setup.

LONG ABSTRACT:

We present a method for visualizing laser-induced, ultrafast molecular rotational wave packet dynamics. We have developed a new 2-dimensional Coulomb explosion imaging setup in which a hitherto-impractical camera angle is realized. In our imaging technique, diatomic molecules are irradiated with a circularly-polarized strong laser pulse. The ejected atomic ions are accelerated perpendicularly to the laser propagation. The ions lying in the laser polarization plane are selected through the use of a mechanical slit and imaged with a high-throughput, 2-dimensional detector installed parallel to the polarization plane. Because a circularly-polarized (isotropic) Coulomb exploding pulse is used, the observed angular distribution of the ejected ions directly corresponds to the squared rotational wave function at the time of the pulse irradiation. To create a real-time movie of molecular rotation, the present imaging technique is combined with a femtosecond pump-probe optical setup in which the pump pulses create unidirectionally-rotating molecular ensembles. Due to the high image throughput of our detection system, the pump-probe experimental condition can be easily optimized by monitoring a real-time snapshot. As a result, the quality of the observed movie is sufficiently high for visualizing the detailed wave nature of motion. We also note that the present technique can be implemented in existing standard ion imaging setups, offering a new camera angle or viewpoint for the molecular systems without the need for extensive modification.

INTRODUCTION:

For a deeper understanding and better use of the dynamic nature of molecules, it is essential to clearly visualize molecular motions of interest. Time-resolved Coulomb explosion imaging is one of the powerful approaches to achieve this objective¹⁻³. In this approach, the molecular dynamics of interest are initiated by a pump ultrashort laser field and are then probed by a time-delayed probe pulse. Upon probe irradiation, molecules are multiply-ionized and broken into fragment ions due to the Coulomb repulsion. The spatial distribution of the ejected ions is a measure of the molecular structure and spatial orientation at the probe irradiation. A sequence of measurement scanning the pump-probe delay time leads to the creation of a molecular movie. It is noteworthy that, for the simplest case—diatomic molecules—the angular distribution of the ejected ions directly reflects the molecular axis distribution (*i.e.*, the squared rotational wave function).

With regard to the pump process, recent progress in the coherent control of molecular motion using ultrashort laser fields has led to the creation of highly-controlled rotational wave packets^{4,5}. Furthermore, the direction of rotation can be actively controlled by using a polarization-controlled laser field⁶⁻⁸. It has therefore been expected that a detailed picture of molecular rotation, including wave natures, could be visualized when the Coulomb explosion imaging technique is combined with such a pump process⁹⁻¹³. However, we sometimes encounter experimental difficulties associated with the existing imaging methods, as mentioned below. The purpose of this paper is to present a new way of overcoming these difficulties and of creating a high-quality movie of molecular rotational wave packets. The first experimental movie of molecular rotation taken with the present method, along with its physical implications, were presented in our previous paper¹¹. The background of development, the detailed theoretical aspect of the present imaging technique, and a comparison with other

existing techniques will be given in a forthcoming paper. Here, we will mainly focus on the practical and technical aspects of the procedure, including the combination of the typical pump-probe optical setup and the new imaging apparatus. As in the previous paper, the target system is unidirectionally-rotating nitrogen molecules¹¹.

The main experimental difficulty of the existing imaging setup, schematically shown in Figure 1, has to do with the position of the detector, or the camera angle. Because the rotational axis coincides with the laser propagation axis⁶⁻⁸ in laser-field-induced molecular rotation, it is not practical to install a detector along the rotational axis. When the detector is installed so as to avoid laser irradiation, the camera angle corresponds to a side observation of rotation. In this case, it is impossible to reconstruct the original orientation of molecules from the projected (2D) ion image¹⁴. A 3D imaging detector¹⁴⁻¹⁹, with which the arrival time to the top detector and the ion impact positions can be measured, offered a unique way to directly observe molecular rotation using Coulomb explosion imaging^{10,12}. However, the acceptable ion counts per laser shot are low (typ. < 10 ions) in the 3D detector, meaning that it is difficult to create a long movie of molecular motion with high image quality¹⁴. The dead time of the detectors (typically ns) also affects the image resolution and imaging efficiency. It is also not a simple task to make a good pump-probe beam overlap by monitoring a real-time ion image with a laser repetition rate of < ~1 kHz. Although several groups have observed rotational wave packets using the 3D technique, the spatial information was limited and/or direct, and a detailed visualization of wave nature, including complicated nodal structures, was not achieved^{10,12}.

The essence of the new imaging technique is the use of the “new camera angle” in Figure 1. In this configuration, laser beam exposure to a detector is avoided while the 2D detector is parallel to the rotational plane, leading to the observation from the rotational axis direction. The slit allows only the ion in the rotational plane (the polarization plane of the laser pulses) to contribute to an image. A 2D detector, which offers a higher count rate (typ. ~100 ions) than a 3D detector, can be used. The setup of the electronics is simpler than in the case of 3D detection, while the measurement efficiency is higher. Time-consuming mathematical reconstruction, such as Abel inversion¹⁴, is also not needed to extract angular information. These features lead to the easy optimization of the measurement system and to the production of high-quality movies. A standard 2D/3D charged-particle imaging apparatus can be easily modified to the present setup without the use of expensive equipment.

PROTOCOL:

NOTE: Through this protocol, we clarify what we actually did to develop the present method. Exact parameters, including chamber and optical setup design and the sizes and types of the parts, are not always essential to apply the present system to the reader’s apparatus. The essence of the procedures will be given as notes in each step.

1. Construction of a 2D-slice imaging apparatus

NOTE: Throughout this step, all the commercially-available parts and equipment, such as a vacuum pump and a detector, are installed according to the manufacturer’s instructions or user’s manuals.

1.1) As in the construction of a typical 2D/3D ion imaging apparatus¹⁴, design and build a differentially-pumped vacuum chamber that has enough space to accommodate a pulsed valve, molecular beam skimmers, ion optics (a stack of 100-mm rings with a 50-mm hole), an off-axis ion imaging unit (a pulsed repeller electrode and a stack of microchannel plates backed by a phosphor screen), and an ion flight tube (> 200-mm drift region) .

1.2) Attach the pulsed valve to the chamber partition using four threaded posts (15 cm, $\phi 12$ mm), for which bolt holes on the partition are concentric to the chamber. Install the molecular beam skimmers to the chamber partition directly in front of the nozzle using a keep plate.

NOTE: In the construction of an ion imaging apparatus, it is essential that the molecular beam axis and laser beam axis intersect at the axis of the ion optics. To achieve this, it is convenient to define the molecular beam axis as a source chamber axis. Step 1.2 is for this purpose. In addition, the skimmer holes should be in line with the nozzle of the valve, ensuring that the center of the molecular beams can enter the differentially-pumped stage through a skimmer. It is also important to consider the weight of the pulsed valve; hence, sufficiently-thick threaded posts must be used to connect the pulsed valve to the partition wall. Maintain the 15-cm distance between the nozzle and the partition in order to avoid the reflection effect of gas and skimmer interference²⁰.

1.3) Install ion optics to the final stage of the differentially-pumped chamber, as in a typical ion imaging setup²¹.

NOTE: This step is carried out as follows: The threaded mounting posts are screwed to the chamber partition. On the posts, a stack of ion optics is locked in place with nuts. Because the bolt holes for the posts are concentric to the chamber, the axis of the ion optics coincides with that of the molecular beam.

1.4) Install the optical glass windows (1-mm thickness, 25-mm diameter, fused silica) by placing a P16 O-ring between a vacuum flange with a hole and a window, so that laser pulses can intersect the molecular beam.

NOTE: Through these windows, laser pulses can access the middle of the first and the second ion electrodes and intersect the axis of ion optics.

1.5) Construct an off-axis ion imaging unit (Figure 2).

NOTE: Throughout this step, refer to Figure 2 to verify the 3-dimensional arrangement of the unit. All the electrode parts (the ion detector and the repeller) are mounted to the 100-mm baseplate with PEEK bolts, while the other parts are mounted with stainless bolts. The essence is to mount a 2D imaging detector in the ion drift region so that its detector surface is parallel to the ion optics axis and perpendicular to the laser propagation axis. Of course, all the parts to be used in high-voltage should be electrically isolated. We recommend that the distance between the ion optics (flight) axis and the detector surface is a few mm (in the present case, 5 mm). With a longer distance, it will take more time to push the ions to a detector, and a shorter distance might result in discharge between the MCP surface and the pulsed repeller.

1.5.1) Observe the edge of the slit blades (100-mm length) with an optical microscope (~30x) and/or an optical comparator and confirm that there are no dents or scratches larger than 30 μm located at edge of the slit blades.

NOTE: The slit blades should be mounted in parallel, and no dents and scratches are acceptable. The deviation from the parallel leads to the inhomogeneity of ion detection. A defect of the blade degrades an observed image (see the discussion section).

1.5.2) Using small mounting claws, attach the slit blades to the slit blade holder, which consists of a pair of 122.4-mm aluminum plates connected with a spring, as in a clothespin. Also insert a tapered aluminum rod into the “clothes pin.”

NOTE: The slit blades are mounted on the knob side (point of effort) of the clothespin. When a tapered aluminum rod of a sharpened pencil-like shape is inserted into the pinching side (point of action) of the clothespin, the slit width becomes larger with increasing depth insertion of the tapered rod (See Figure 2B). Steps 1.5.2-1.5.4 are for the construction of the slit, the width of which can be tuned during the imaging measurement. If width tuning is not needed, just install the slit blade ~10 cm upstream of the ion beam from the detector using suitable mounting parts as metal claws and go to step 1.5.5.

1.5.3) Attach the tapered aluminum rod to the linear motion vacuum feedthrough (micrometer/bellows-based, ICF70 size) and mount the slit holder and base to the vacuum side plane of the feedthrough.

1.5.4) Install the slit unit constructed above onto an ICF70 vacuum port that is perpendicular both to the detector axis and to the ion flight axis.

NOTE: The position is ~10 cm upstream of the ion beam from the center of the detector.

1.5.5) Set the slit width to 1 ± 0.1 mm using a micrometer.

NOTE: For example, the use of a 1-mm slit for the 50-mm Newton sphere (ion cloud) corresponds to 2% slicing, which is higher in resolution than the standard slice technique²². The slit width determines the slice resolution; however, smaller widths lead to weaker signals.

1.5.6) Install a pulsed repeller electrode of rectangular (115 mm x 160 mm x 3mm) stainless plate, as in Figure 2.

NOTE: The pulsed repeller should be parallel to the detector to ensure the homogeneity of the pulsed electric field between them.

1.5.7) Install a position-sensitive ion detector consisting of a stack of microchannel plates backed by a phosphor screen so that it is parallel to the pulsed repeller; follow standard mounting procedure^{14,23}.

1.5.8) Install a flange-mounted vacuum viewport with a copper gasket to the back of the phosphor screen.

1.6) Wire the ion optics to high-voltage power supplies and the parts of the detector (a pulsed

repeller, microchannel plates, and a phosphor screen) to pulsed high-voltage supplies (~50 ns rise/fall time) via current feedthroughs.

NOTE: Care should be taken to ensure that any cables do not interrupt the observation of the phosphor screen through the viewport.

1.7) Connect the pulsed valve to the gas inlet (3% N₂ gas in He; total pressure of 3 MPa) with a stainless tube and to the valve controller with a pair of coated copper wires.

NOTE: Both connections pass through vacuum feedthroughs.

1.8) Turn the vacuum pumps on and set the pressure of the imaging detector chamber lower than 10⁻⁴ Pa, even when the pulsed valve is in operation.

NOTE: A higher pressure might lead to the damage of the high-voltage electrode and detectors. When the pressure is higher, larger pumps or the reduction of the repetition rate of the valve is required. Using the present chamber and pulsed valve, a nitrogen molecular beam with a rotational temperature below 6 K can be generated¹¹. At this rotational temperature, 99% of the molecules are in the $J \leq 2$ state (J is the rotational quantum number).

2. Construction of a pump-probe optical setup

NOTE: For this step, see Figure 3 to understand where and how the following steps are carried out. The purpose of this step is to create three collinear fs pulses from a commercial Ti:sapphire laser amplifier for the pump-probe experiment¹¹. The first pulse was for molecular alignment (linearly polarized, center wavelength of 820 nm, peak intensity < 30 TW/cm²), the second was for the direction control (a delayed replica of the first one, except for the linear polarization +45° tilted from the polarization axis of the first pulse), and the third was the Coulomb explosion imaging probe (circularly polarized, 407 nm, 100 fs, 600 TW/cm²). Throughout this step, all the commercially-available parts and equipment, such as a polarization checker and an optical stage, are installed and used according to the manufacturer's instructions or user's manuals.

NOTE: Throughout this step, all the optical components are installed and used according to the standard procedures of optical experiments and the manufacturer's guide for optics. All the turning and dichroic mirrors used are dielectric multilayer mirrors in order to avoid laser power loss during the many reflections in the optical path. Some of the optics and crystals used are shown in the material list for this article.

2.1) Turn the femtosecond laser (Ti:sapphire amplifier) system on and acquire a laser output of more than 1.5 mJ/pulse, a ~35-fs duration, a 820-nm center wavelength, and a 500-Hz repetition rate.

2.2) Prepare an optical path of the probe (imaging) pulse¹⁰⁻¹².

2.2.1) Install a nonlinear crystal (BBO, type I, 0.2-mm thickness, 29.2°, for the second-harmonic generation of an 820-nm light) in the 820-nm optical path to obtain the second harmonics (> 0.2 mJ) of the fundamental 820-nm laser output. Use the generated second harmonics (407-nm

light) as a probe pulse after it is reflected by dichroic mirrors and separated from the fundamental 820-nm light.

2.2.2) Construct an optical path, as shown by the blue line in Figure 3. Using beam-steering mirror mounts, align this beam to pass through the center of both windows installed in step 1.4. NOTE: The key components consist of an attenuator (the combination of a half-waveplate and a polarizer), a motorized linear stage for delay scanning, and waveplates for polarization tuning.

2.3) Prepare an optical path for the pump (rotational excitation) pulses²⁴⁻²⁶.

2.3.1) Construct an optical path, as shown by the red line in Figure 3, and obtain a pair of time- and polarization-tunable fs pulses.

NOTE: The residual 820-nm pulse (~1 mJ) after the second-harmonic generation in step 2.2.1, ejected from the dichroic mirror, is used to create these pump pulses. The typical pulse energy of each pump pulse is 0.25 mJ. The key components consist of an attenuator (the combination of a half-waveplate and a polarizer), a 50:50 beam splitter, a manual linear stage for time-delay tuning, waveplates for polarization tuning, and a telescope for the spot-size optimization.

2.3.2) By adjusting the tilt of the mirror mounts in the optical path, align the pair of pump beams to be parallel and make their center pass through the center of both windows installed in step 1.4.

NOTE: To verify this, an alignment tool, an aluminum block with attached graph paper, is used. The tool can be placed in the same position with high reproducibility using the tapped hole of an optical table. Two screw holes in line are chosen as a guide of the parallel path. As the alignment tool is positioned in one of the holes selected, the beams are aligned so that they hit the same point of the alignment tool. Repeat the positioning of the tool and the alignment of the beam until the beam hits the same point of the tool for both alignment-tool positions. Because the screw holes in the optical table are in line with high precision, these procedures lead to the creation of the parallel beams.

2.4) Adjust the polarization states of the pulses.

2.4.1) Install a polarization checker just before the pulses enter the chamber so that the laser pulses hit the detector of the checker.

2.4.2) Adjust the angle of the waveplates using a rotational optics mount in each optical path. Obtain the circularly-polarized probe pulse, the vertically-polarized first pump pulse, and the linearly-polarized second pump pulse; for the second pump, tilt the polarization plane 45° from that of the first pump.

NOTE: With the use of a polarization checker, the polarization state of each pulse can be visualized as a polar angle-dependent transmission intensity. To obtain a circular polarization, adjust the waveplate angle to achieve an isotropic image, for example.

2.4.3) Remove the polarization checker from the optical path.

NOTE: The first pump initiates direction-undefined rotation^{4,9,10}. At the time of the

instantaneous molecular alignment, the second pump is shined to create an asymmetric torque and to start the unidirectional rotation^{12,13}. Since a circularly-polarized probe pulse ionizes the molecules without angular preference in the polarization plane, it is suitable for an angular distribution measurement.

2.5) Find the temporal overlap of each pulse.

2.5.1) Install a nonlinear crystal (BBO, 0.2-mm thickness, type 2, for the third-harmonic generation of 820-nm light), an optical window that has the same thickness (3 mm) as the sum of the chamber window (1 mm) and the focusing plano-convex lens (2 mm), and a dispersion prism just before the pulses enter the chamber.

NOTE: A standard procedure to determine the time zero (temporal overlap of the pump and probe pulse) in the pump-probe experiment is to detect a nonlinear response, which is observed only when both the pump and the probe pulse simultaneously interact with a medium. Here, the temporal overlap of the 407-nm probe pulse and the 820-nm pump pulse in the nonlinear crystal leads to a 267-nm generation. We have to estimate the temporal overlap of the beams in the vacuum chamber while step 2.5.1 is carried out before the pulses enter the chamber (and the focusing lens and chamber window). Therefore, to compensate the time delay introduced by the chamber window and the focusing lens, a 3-mm optical window is installed. Two pumps and one probe pass through the window and then the crystal, and they are subsequently dispersed by a prism. Place a sheet of white paper after the prism to detect the generation of the 267-nm third harmonics as a white-blue fluorescence. All the mentioned parts are mounted on an optical holder.

2.5.2) Block the line of pump 2 in Figure 3 with a beam dumper.

2.5.3) Pressing the move button on a stage controller, scan the motorized stage and find a 267-nm generation,.

NOTE: When the optical path length of the pump and probe pulses are the same within the duration of the laser pulses, a third-harmonics signal appears. This stage position is regarded as time 0, during which both the pump and the probe are simultaneously hitting the molecules.

2.5.4) Block pump 1 and unblock pump 2 (remove the beam dumper).

2.5.5) Scan the μm -based manual stage installed in the pump 2 line and find the position at which the 267-nm emission occurs.

2.5.6) Remove the crystal, the window, and the prism from the optical line.

NOTE: At this stage, the three pulses are temporarily overlapped at the molecular beam within the laser durations. The time resolution of the setup can be measured as a cross-correlation by monitoring and plotting the 267-nm energy while scanning the motorized stage in the probe path. In the present setup, the full width at half maximum of the correlation function is ~ 120 fs. The pulse width is optimized to obtain the highest power output of the second harmonics. After the second-harmonic generation, the pulses pass through glass lenses, waveplates, dichroic

mirrors, polarizers, and the chamber window, leading to a chirp. Because the group delay dispersion of the materials in the 400-nm region is much larger than in the 800-nm region, we minimize the transmission optics in the probe path. To improve the time resolution, dispersion management, including a chirped mirror system, will be helpful.

3. Setup for a measurement system

NOTE: Throughout this step, all the commercially-available parts and equipment, such as a power supply and delay generators, are installed and used according to the manufacturer's instructions or user's manuals.

3.1) Pulse synchronization

3.1.1) Divide the 80.8-MHz output of a femtosecond oscillator to 500 Hz with a fast frequency-divider, and use this divided output to trigger digital delay generator 1 and a fs amplifier.

3.1.2) Use one of the delayed outputs of delay generator 1 as a trigger for the pulsed valve.

NOTE: Limit the repetition rate of the valve to maintain acceptable vacuum conditions (less than 10^{-3} Pa, for example). In this case, we set the value to 250 Hz.

3.1.3) Install a fast photodiode equipped with a 400-nm transmission filter just after the beams exit the chamber, and use the output of this diode as a trigger for digital delay generator 2.

NOTE: The probe pulse is used as a time origin for the ion imaging electronics.

3.1.4) Connect three high-voltage switches to digital delay generator 2 with coaxial cables.

3.2) Turn all high-voltage power supplies and switches on.

3.3) Increase the voltage to the target values.

NOTE: The target voltages depend on the size of the apparatus and the system of interest. Typical values in the present case are shown in the caption of Figure 1. To obtain undistorted images, fine-tuning the bias voltages is required¹³ (see step 4.1.7). A rapid increase in the voltage value might result in the discharge of or damage to the electronics system. We recommend an increase of less than 100 V/s for daily operation and an increase of 100 V/300 s for the first use in a vacuum.

3.4) Installation and positioning of the imaging camera

3.4.1) Install a digital camera equipped with a $f = 25$ mm camera lens on the optical post in front of the vacuum viewport set in step 1.5.5. Ensure that the camera axis is perpendicular to the detector surface. Because the viewport is perpendicular to the floor level, use a water-level guide to align the camera base horizontally relative to the floor.

NOTE: Fine adjustments of the position are done in a later step.

3.4.2) Install a cooling fan for the camera so that the wind hits the camera from the back.

3.4.3) Cover the region between the camera lens and the vacuum viewport with a curtain so

that unwanted light, such as ambient room lighting, does not enter the camera.

3.4.4) Connect the camera to a computer via a USB 3.0 port.

3.4.5) Start the camera control software and maximize the gain of the camera by entering the maximum value in the gain control section of the software.

3.4.6) Set the image size to typ. 1200 x 750 pixels.

NOTE: Although a larger image size leads to higher resolution, the data rate of the USB 3.0 port limits the acceptable frame rate. At the present settings, more than 250 fps can be achieved, which is high enough to obtain an image for every gas pulse loading (250 Hz).

3.4.7) Start capturing images with the camera by clicking the “Grab” button. Manually adjust the position of the camera so that the image covers the entire area of the 2D detector. Fix the camera mount with a bolt.

3.4.8) By monitoring a real-time captured image, adjust the focus ring of the camera lens so that the bright ion spot size becomes the minimum.

4. Measurements

NOTE: The measurement method used here is a combination of reported procedures^{14,27} and the present imaging setup. Throughout this step, all the commercially-available parts and equipment, such as high-voltage electronics, are installed and used according to the manufacturer’s instructions or user’s manuals.

4.1) Finding the signal and optimizing the settings for ion imaging

4.1.1) Block the pump pulses of the optical system with a beam dumper.

4.1.2) In the middle of the first and the second electrodes of the ion optics, install a plano-convex lens ($f = 120$ mm) to focus the probe laser pulse to the molecular beam.

4.1.3) Set the time of the high-voltage switches (a digital delay generator output) to the estimated arrival time of the N_2^+ ion, which provides the largest signal intensity under the present gas condition^{14,27}.

NOTE: The arrival time can be estimated from the ion optics biases and the distance of flight, along with the mass-to-charge ratio of the target ion²⁸. Otherwise, scanning the time is the other solution for detecting a signal.

4.1.4) While monitoring the ion image, adjust the lens position with an xyz-stage and the gas pulse time (a digital delay generator output), and acquire the largest signal (brightest and largest image).

4.1.5) Change the time of the high-voltage switches to the Coulomb exploded N^{2+} channel^{14,27}.

NOTE: Because the mass-to-charge ratio of N^{2+} is four times smaller than that of N_2^+ , the arrival

time of N^{2+} is almost two times faster than that of N_2^+ .

4.1.6) Decrease the camera frame rate to ~20 fps and increase the exposure time to 50 ms.

NOTE: With this setting, the camera image includes the signal for 12 gas pulse loadings. Although this leads to the overlap of some ions, we can easily evaluate and recognize the rough shape of the ion distribution.

4.1.7) Adjust the ion optic biases so that the observed ion distribution becomes an undistorted ellipse.

NOTE: Decreasing the bias difference between the first and the second electrodes results in the elongation of the vertical direction (ion optics axis) in the present arrangement^{29,30}. The third or later optics are used for the fine adjustment of the shape. The distortion of the ellipse degrades the angular resolution reconstructed from the image.

4.2) Finding a pump-probe spatial overlap

4.2.1) Unblock pump 1, removing a beam dumper, but keep pump 2 blocked.

4.2.2) Adjust the telescope to locate the beam waist of the pump pulse in a molecular beam.

NOTE: Do not change the position of the focusing lens in front of the chamber window, which is optimized for the probe pulse.

NOTE: This procedure can be accomplished by reflecting the laser beams to the free space under atmospheric pressure just before they enter the vacuum chamber. By measuring the focal length for the same entrance lens, the telescope can be optimized.

4.2.3) Carefully adjust the spot position of the pump beam with high-resolution mirror mount 1 (Figure 2), and find the enhanced signal in the ion image due to the pump-probe overlap. Before or after that, set t to ~4 ps by moving a delay stage 600 μm forward. Find the strongly-anisotropic image along the pump 1 polarization.

NOTE: Because the time overlap was roughly optimized in step 2.5, only the spatial overlap needs to be tuned. If the rotational constant or wave packet dynamics are known for the target molecule, an alternative choice is to set the probe delay to an instantaneous molecular alignment time. For example, it could occur at $\Delta t \sim 1/2B$, where Δt is the time difference between the pump and probe pulse and B is the rotational constant in Hz ^{10,11}. For N_2 , ~8.3 ps. At such a time, the pump-probe spatial overlap leads to the ion distribution showing the maximum in the pump polarization direction (vertical in the present case) and the minimum in the perpendicular axis. It is easier to find such an alignment signature compared to the gross enhancement obtained at $\Delta t \sim 0$. With regard to the changing of the Δt , note that, according to the speed of light, a 5- μm movement of the stage corresponds to ~33.356 fs.

4.2.4) Block pump 1 and unblock pump 2.

4.2.5) Repeat step 4.2.3 for pump 2. Find a pump-probe overlap for pump 2 by adjusting high-resolution mirror mount 2 (Figure 2) while keeping the optical path of pump 1 unchanged.

NOTE: Be sure that the polarization of pump 2 is tilted so that the alignment is observed along

an oblique direction when the time is set to the alignment time.

4.3) Briefly observe the unidirectional rotation dynamics

4.3.1) Unblock pump 1. Set the time delay between pumps 1 and 2 to the alignment time (*e.g.*, 4.0 ps for a N₂ case^{10,11}) with the manual delay stage 1 in Figure 2.

4.3.2) Check to determine if the unidirectional rotation can be recognized from camera images as the probe delay is scanned (with a motorized or manual stage).

NOTE: When all the above procedures are well accomplished, one can see the images in which the brightest region smoothly rotates in one direction as the probe delay is scanned. If such a movie cannot be seen, carefully repeat steps 4.1-4.2. The drift effect of optical mounts sometimes degrades the beam overlap.

NOTE: According to the speed of light, a 5- μ m movement of the stage corresponds to ~ 33.356 fs. For merely observational purposes, the above-mentioned procedures are sufficient. For the recording and detailed analysis of the motion, go on to the following steps.

4.4) Setup measurements

4.4.1) Increase the camera frame rate to 250 fps and decrease the exposure time to ~ 4 ms.

NOTE: One camera frame corresponds to an image for one laser shot/gas pulse loading.

4.4.2) Start the measurement program, which controls the instruments, captures the images, and analyzes and visualizes data.

4.4.3) Click the execute button and capture 1,000 images while blocking the pump beams.

4.4.4) Numerically fit the summed image with an ellipse and obtain the ellipticity ε and the center of the ellipse (x_0, y_0).

NOTE: When a raw image has more than one ellipse due to the multiple channels of the Coulomb explosion, limit the region of interest and use only one of the ellipses.

4.4.5) Capture 100,000 images while blocking the pump beams and use the obtained image as a probe-only reference.

NOTE: The signal-to-noise ratio of the probe-only reference image affects the quality of angular distribution. Therefore, a relatively long measurement (~ 400 s) is taken for this step.

4.5) Taking a movie of unidirectional molecular rotation

4.5.1) Unblock the pump beams.

4.5.2) Set the probe time to a negative value ($t \sim -100$ fs; *i.e.*, before the pump beams).

4.5.3) Start the measurement loop, including the following steps:

4.5.3.1) Capture an image. Find the center-of-mass coordinate of each bright ion spot, and binarize the image by assigning "1" to the center of the mass coordinates and "0" to the other

pixels²⁷.

4.5.3.2) Sum the binarized images for 10,000 camera frames by setting “the number of images” input box of the program to 10,000.

NOTE: To avoid the saturation effect, set the image depth of the summed image to 16 bits.

4.5.3.4) Convert the camera coordinate (x,y) to the polar coordinate using the ellipticity ε determined in step 4.4.4.

NOTE: This process is completed as follows: In the elliptical region of interest, all the pixel coordinates (x,y) are converted to their relative polar coordinates ϕ using the following equation:

$$\phi = \arctan \left[\frac{(y-y_0)}{\varepsilon (x-x_0)} \right].$$

NOTE: This step is equivalent to the image expansion in the vertical direction when converting an ellipse to a circle.

4.5.3.5) Convert the obtained image to a polar plot in which the angular-dependent signal intensity is plotted as the distance from the origin.

NOTE: Angle-dependent probability $P(\phi)$ is calculated using the following equation:

$$P(\phi) = \frac{(\text{sum of the pixel values of which pixels are in } \phi \pm 0.5^\circ)}{(\text{number of pixels located in } \phi \pm 0.5^\circ)}.$$

4.5.3.7) Normalize the polar plot, dividing it by that of the probe-only reference.

NOTE: This step calibrates both the incomplete circular polarization of the probe pulse and the inhomogeneity of the imaging detector.

4.5.3.6) Move the probe time forward by ~ 33.356 fs.

NOTE: A 33.356-fs shift of the probe time corresponds to a 5- μm movement of the motorized linear stage.

4.5.4) Continue the loop until at least one rotational revival period, $1/2B$ (~ 8.3 ps for N_2), is passed after the pump 2 time.

REPRESENTATIVE RESULTS:

Figure 4A shows a probe-only raw image of the N^{2+} ion ejected upon probe irradiation (Coulomb explosion), taken for one probe laser shot. Each bright spot corresponds to one ion. Figure 4B shows a summed image of 10,000 binarized raw camera images. These images show that our imaging setup can monitor the molecules of all the orientation angles in the polarization plane. Figure 4C shows the normalized polar plot corresponding to that of Figure 4B. Because the rotational control (pump) pulse was absent, the distribution is isotropic (Figure 4C shows a circle).

In Figure 4B, a small defect due to detector inhomogeneity can be seen in the bottom of the

ellipse. Such a defect always appears in the same position of the image. Therefore, it can be compensated for by normalizing the observed images with a probe-only image (step 4.5.3.7).

Figure 5 shows selected snapshots taken after the irradiation of the two pump pulses. So as to improve understanding, not only the observed ion images, but also the corresponding polar plots and “dumbbell” model pictures are shown as a function of probe time. The polar plots are created in step 4.5.3.5. The dumbbell picture is an overlapped image of dumbbells of various orientation angles, and their weights (opacity) are the observed angular probabilities. The sequence of images forms a clear movie of unidirectional molecular rotation. The wave nature of motion can be seen as the complicated nodal structures and the dispersion, including an “X”-shape formation.

Figure 6 shows an ion image taken with a damaged slit and a photograph of the slit edge with a dent. A small defect largely affects the observed image. In such a case, repeating step 1.5 is required. This fact is also discussed in the discussion section.

Figure 7 shows the raw camera image at the optimized pump-probe overlap condition. By monitoring such a beam overlap signal, the optical paths can be optimized. This leads to a clear movie, as in Figure 5.

FIGURE LEGENDS:

Figure 1: Conceptual diagram of the camera angles in the impractical, typical, and new configurations. In the typical camera angle, a detector is installed to avoid laser exposure, but the ejection angles of ions cannot be reconstructed from the 2D projected image. In the present, new camera angle, the rotational plane (laser polarization plane) is parallel to the detector surface and is therefore suitable for visualizing the rotational motion. Typical bias voltages are 2,500 V, 1,799 V, 1,846 V, 253 V, 0 V, 3,500 V, -800 V, and 4,500 V for ion optics 1, 2, 3, 4, and 5, the pulsed repeller, the microchannel plates, and the phosphor screen, respectively. The ion optics numbering starts at the bottom electrode.

Figure 2: Schematic diagrams of the 2D imaging unit. (A) Schematic diagram of the detector assembly. A circle plate colored in orange is a baseplate to which the other parts are mounted with bolts. (B) Schematic diagram of the slit assembly. The right picture explains the motion of the slit. The size values are in mm.

Figure 3: Schematic diagram of the present pump-probe optical setup. The optical paths of the pump pulses for rotational excitation are illustrated by the red lines, while that of the probe (imaging) pulse is shown by the blue line. NLC, nonlinear crystal for second-harmonic generation; HWP, half-waveplate; QWP, quarter-waveplate; DM, dichroic mirror; BS, 50:50 beam splitter; HRM: high-resolution mirror mount.

Figure 4: Raw and analyzed Coulomb exploded ion images. (A) A typical raw image of N^{2+} taken for one probe shot. (B) Summed image for 10,000 binarized camera images. The size of the camera image is 1,200 x 750 pixels. The corresponding real-space size is 80 mm x 50 mm.

(C) The normalized polar plot constructed from the summed image. In the raw and summed images, false color was added to show the signal intensity. The polar angles in degrees are shown along the circumference. The radial value is an angle-dependent probability (arbitrary unit).

Figure 5: Selected snapshots of the laser-induced rotational wave packet dynamics. In each time delay, the upper panel shows the ion image in which the elliptical shape has been converted to a circle. The middle panel shows the corresponding polar plot. The bottom panel shows a dumbbell model of the angular distribution. This dumbbell picture is an overlapped image of dumbbells from various orientation angles, and their weights (opacity) are the observed angular probabilities. The polar plot uses the same unit and scale as in Figure 4. The ion image employs transformed coordinates, as in step 4.5.3.4.

Figure 6: Effect of the slit defect on the experimental ion image. (A) Observed probe-only N_2^+ ion image taken with a damaged slit. (B) Photograph of the slit edge having a sub-mm dent.

Figure 7: Raw camera image at the optimized pump-probe overlap condition. The probe time is set at $t = 4.0$ ps after the first pump pulse irradiation. At this time, the maximum degree of molecular alignment is achieved. The size of the camera image is 1,200 x 750 pixels. The corresponding real-space size is 80 mm x 50 mm.

DISCUSSION:

The present procedure enables us to capture a real-time movie of molecular rotation with a slit-based 2D imaging setup. Because the observed ions pass through the slit, step 1.5 is one of the critical steps. The edges of the slit blades must be sharp. When there is a small defect, such as a 0.3-mm dent in the slit, a scratch is observed in the ion image (Figure 6). In such a case, the slit blade should be polished with 2,000-grit wet sandpaper.

Apart from the unique camera angle shown in Figure 1, this method has several advantages over the 3D imaging detector, which was previously the only solution for rotational wave packet imaging.

First, in the present procedure, optical beam alignment can be carried out easily by monitoring raw ion images, as in steps 4.1-4.2. Figure 7 shows the raw camera image at the optimized pump-probe overlap condition. When the pump-probe beam overlap is lost, anisotropic or enhanced image signatures cannot be seen, as in Figure 4A. This fact emphasizes the importance of steps 4.1-4.2 in the present method. Because the spot sizes of the pump and probe beams are on the order of 10 μm , it is generally difficult to find an optimal overlap condition without monitoring real-time images. In the case of a 3D imaging detector, several seconds are required to form an image with sufficient data points (at least 1,000 ions) when a 1,000-Hz or lower repetition-rate laser is employed, because the count rate is limited to a few events per laser shot in the 3D detector. In the present method, on the other hand, the count rate is essentially unlimited, and the number of ions per frame can be increased simply by extending the exposure time. In the present case, more than 1,000 ions are detected within the

50-ms exposure time.

The high count rate of the present method also leads to a shorter data acquisition time. Because the frame rate of the camera is 250 fps, it takes only ~ 40 s to take one snapshot of the molecular motion at a particular time. For the measurement over the one molecular rotational revival time (~ 8.4 ps) with a ~ 33 -fs step, the measurement time is only a few hours. This is another advantage, because experimental data would be degraded by the limited long-term stability of the lasers and the entire experimental setup. In our setup, for example, time duration changes with time, partly due to the temperature change in the fs amplifier. A 3-K change within 6 h resulted in the thermal expansion of the amplifier, including the elongation of the distance between the pulse compressor gratings, leading to the elongation of the pulse duration³¹. Laser-beam drift, which degrades the signal of the pump-induced dynamics, was also detected within ~ 8 h, although the origin of this drift was not identified.

The present technique is a type of 2D imaging, limiting the information in 3D. In the case of a Coulomb explosion, only the fragment of ions ejected in the detection plane contribute to the image. This implies that it is difficult to apply the present method directly to complicated fragmentation processes, such as those involved in coincidence imaging studies^{25,32,33}. We note that the sum of the signal intensity with our method is proportional to the probability in the detection plane. This represents indirect information on the dimension not included in the imaging plane^{11,12}.

While we focus on Coulomb explosion imaging in this paper, the present approach can be, in principle, applied to general charged-particle imaging, such as that involved in photodissociation studies¹⁴. In the existing imaging procedure, to obtain a 2D tomogram of a 3D Newton sphere of charged particles, the polarization of light should be parallel to the detector surface. In other words, the camera angle is limited to particular conditions. Also, in the present 2D imaging technique, a 3D ion cloud is spatially sliced to a 2D cut and is then imaged. With this slice imaging, the freedom of the camera angle will open a way to obtain hitherto-unobserved information that sometimes appears in the laser propagation direction^{26,34}.

ACKNOWLEDGMENTS:

This work was supported in part by grants-in-aid KAKENHI from the Japan Society for the Promotion of Science (JSPS) and the Ministry of Education, Culture, Sports, Science, and Technology (MEXT) Japan (#26104539, #26620020, #26810011, #15H03766, #15KT0060, #16H00826, and #16K13927); the Konica Minolta Science and Technology Foundation; the “Planting Seeds for Research” program of TokyoTech; the Imaging Science Project of the Center for Novel Science Initiatives (CNSI) at the National Institutes of Natural Sciences (NINS) (#IS261006); the RIKEN-IMS joint program on “Extreme Photonics;” and the Consortium for Photon Science and Technology (CPhoST).


DISCLOSURES:



The authors have nothing to disclose.


REFERENCES:


- 1 Stapelfeldt, H., Constant, E., Sakai, H. & Corkum, P. B. Time-resolved Coulomb explosion imaging: A method to measure structure and dynamics of molecular nuclear wave packets. *Phys. Rev. A* **58**, 426-433, (1998) 10.1103/PhysRevA.58.426.
- 2 Hishikawa, A., Matsuda, A., Fushitani, M. & Takahashi, E. J. Visualizing Recurrently Migrating Hydrogen in Acetylene Dication by Intense Ultrashort Laser Pulses. *Phys. Rev. Lett.* **99**, 258302, (2007) 10.1103/PhysRevLett.99.258302.
- 3 Légaré, F. *et al.* Laser Coulomb-explosion imaging of small molecules. *Phys. Rev. A* **71**, 013415, (2005) 10.1103/PhysRevA.71.013415.
- 4 Stapelfeldt, H. & Seideman, T. Colloquium: Aligning molecules with strong laser pulses. *Rev. Mod. Phys.* **75**, 543–557, (2003) 10.1103/RevModPhys.75.543.
- 5 Ohshima, Y. & Hasegawa, H. Coherent rotational excitation by intense nonresonant laser fields. *Int. Rev. Phys. Chem.* **29**, 619–663, (2010) 10.1080/0144235x.2010.511769.
- 6 Kitano, K., Hasegawa, H. & Ohshima, Y. Ultrafast Angular Momentum Orientation by Linearly Polarized Laser Fields. *Phys. Rev. Lett.* **103**, 223002, (2009) 10.1103/PhysRevLett.103.223002.
- 7 Fleischer, S., Khodorkovsky, Y., Prior, Y. & Averbukh, I. S. Controlling the sense of molecular rotation. *New J. Phys.* **11**, 105039, (2009) 10.1088/1367-2630/11/10/105039.
- 8 Korobenko, A., Milner, A. A. & Milner, V. Direct Observation, Study, and Control of Molecular Superrotors. *Phys. Rev. Lett.* **112**, 113004, (2014) 10.1103/PhysRevLett.112.113004.
- 9 Rosca-Pruna, F. & Vrakking, M. J. J. Revival structures in picosecond laser-induced alignment of I₂ molecules. I. Experimental results. *J. Chem. Phys.* **116**, 6567–6578, (2002) 10.1063/1.1458537.
- 10 Dooley, P. W. *et al.* Direct imaging of rotational wave-packet dynamics of diatomic molecules. *Phys. Rev. A* **68**, 023406, (2003) 10.1103/PhysRevA.68.023406.
- 11 Mizuse, K., Kitano, K., Hasegawa, H. & Ohshima, Y. Quantum unidirectional rotation directly imaged with molecules. *Sci. Adv.* **1**, e1400185 (2015) 10.1126/sciadv.1400185.
- 12 Lin, K. *et al.* Visualizing molecular unidirectional rotation. *Phys. Rev. A* **92**, 013410, (2015) 10.1103/PhysRevA.92.013410.
- 13 Korobenko, A., Hepburn, J. W. & Milner, V. Observation of nondispersing classical-like molecular rotation. *Phys. Chem. Chem. Phys.* **17**, 951-956, (2015) 10.1039/c4cp04434g.
- 14 Whitaker, B. J. *Imaging in Molecular Dynamics*. (Cambridge University Press, 2003).
- 15 Ullrich, J. *et al.* Recoil-ion and electron momentum spectroscopy: reaction-microscopes. *Rep. Prog. Phys.* **66**, 1463, (2003) 10.1088/0034-4885/66/9/203.
- 16 Lee, S. K. *et al.* Coincidence ion imaging with a fast frame camera. *Rev Sci Instrum* **85**, 123303, (2014) 10.1063/1.4903856.
- 17 Lee, S. K. *et al.* Communication: Time- and space-sliced velocity map electron imaging. *J. Chem. Phys.* **141**, 221101, (2014) doi:<http://dx.doi.org/10.1063/1.4903744>.
- 18 John, J. J. *et al.* PlmMS, a fast event-triggered monolithic pixel detector with storage of multiple timestamps. *Journal of Instrumentation* **7**, C08001, (2012)
- 19 Nomerotski, A. *et al.* Pixel Imaging Mass Spectrometry with fast and intelligent Pixel detectors. *Journal of Instrumentation* **5**, C07007-C07007, (2010) 10.1088/1748-0221/5/07/c07007.



- 20 Luria, K., Christen, W. & Even, U. Generation and Propagation of Intense Supersonic Beams. *J. Phys. Chem. A* **115**, 7362-7367, (2011) 10.1021/jp201342u.
- 21 Eppink, A. T. J. B. & Parker, D. H. Velocity map imaging of ions and electrons using electrostatic lenses: Application in photoelectron and photofragment ion imaging of molecular oxygen. *Rev. Sci. Instrum.* **68**, 3477-3484, (1997) 10.1063/1.1148310.
- 22 Gebhardt, C. R., Rakitzis, T. P., Samartzis, P. C., Ladopoulos, V. & Kitsopoulos, T. N. Slice imaging: A new approach to ion imaging and velocity mapping. *Rev. Sci. Instrum.* **72**, 3848, (2001) 10.1063/1.1403010.
- 23 Stöhr, J. *NEXAFS Spectroscopy*. 132 (Springer, 1992).
- 24 Siders, C. W., Siders, J. L. W., Taylor, A. J., Park, S.-G. & Weiner, A. M. Efficient High-Energy Pulse-Train Generation Using a 2 n-Pulse Michelson Interferometer. *Appl. Opt.* **37**, 5302-5305, (1998) 10.1364/AO.37.005302.
- 25 Pitzer, M. *et al.* Direct Determination of Absolute Molecular Stereochemistry in Gas Phase by Coulomb Explosion Imaging. *Science* **341**, 1096-1100, (2013) 10.1126/science.1240362.
- 26 Rakitzis, T. P., Samartzis, P. C. & Kitsopoulos, T. N. Observing the symmetry breaking in the angular distributions of oriented photofragments using velocity mapping. *J. Chem. Phys.* **111**, 10415, (1999) 10.1063/1.480396.
- 27 Chang, B.-Y., Hoetzlein, R. C., Mueller, J. A., Geiser, J. D. & Houston, P. L. Improved two-dimensional product imaging: The real-time ion-counting method. *Rev. Sci. Instrum.* **69**, 1665, (1998) 10.1063/1.1148824.
- 28 Wiley, W. C. & McLaren, I. H. Time-of-Flight Mass Spectrometer with Improved Resolution. *Rev. Sci. Instrum.* **26**, 1150, (1955) 10.1063/1.1715212.
- 29 Townsend, D., Minitti, M. P. & Suits, A. G. Direct current slice imaging. *Rev. Sci. Instrum.* **74**, 2530, (2003) 10.1063/1.1544053.
- 30 Wu, G. *et al.* A new crossed molecular beam apparatus using time-sliced ion velocity imaging technique. *Rev. Sci. Instrum.* **79**, 094104, (2008) 10.1063/1.2978004.
- 31 Treacy, E. Optical pulse compression with diffraction gratings. *Quantum Electronics, IEEE Journal of* **5**, 454-458, (1969) 10.1109/jqe.1969.1076303.
- 32 Dörner, R. *et al.* Cold Target Recoil Ion Momentum Spectroscopy: a 'momentum microscope' to view atomic collision dynamics. *Physics Reports* **330**, 95-192, (2000) 10.1016/s0370-1573(99)00109-x.
- 33 Herwig, P. *et al.* Imaging the Absolute Configuration of a Chiral Epoxide in the Gas Phase. *Science* **342**, 1084-1086, (2013) 10.1126/science.1246549.
- 34 Suzuki, Y.-I. & Suzuki, T. Linear and circular dichroism in photoelectron angular distributions caused by electron correlation. *Phys. Rev. A* **91**, 053413, (2015) 10.1103/PhysRevA.91.053413.

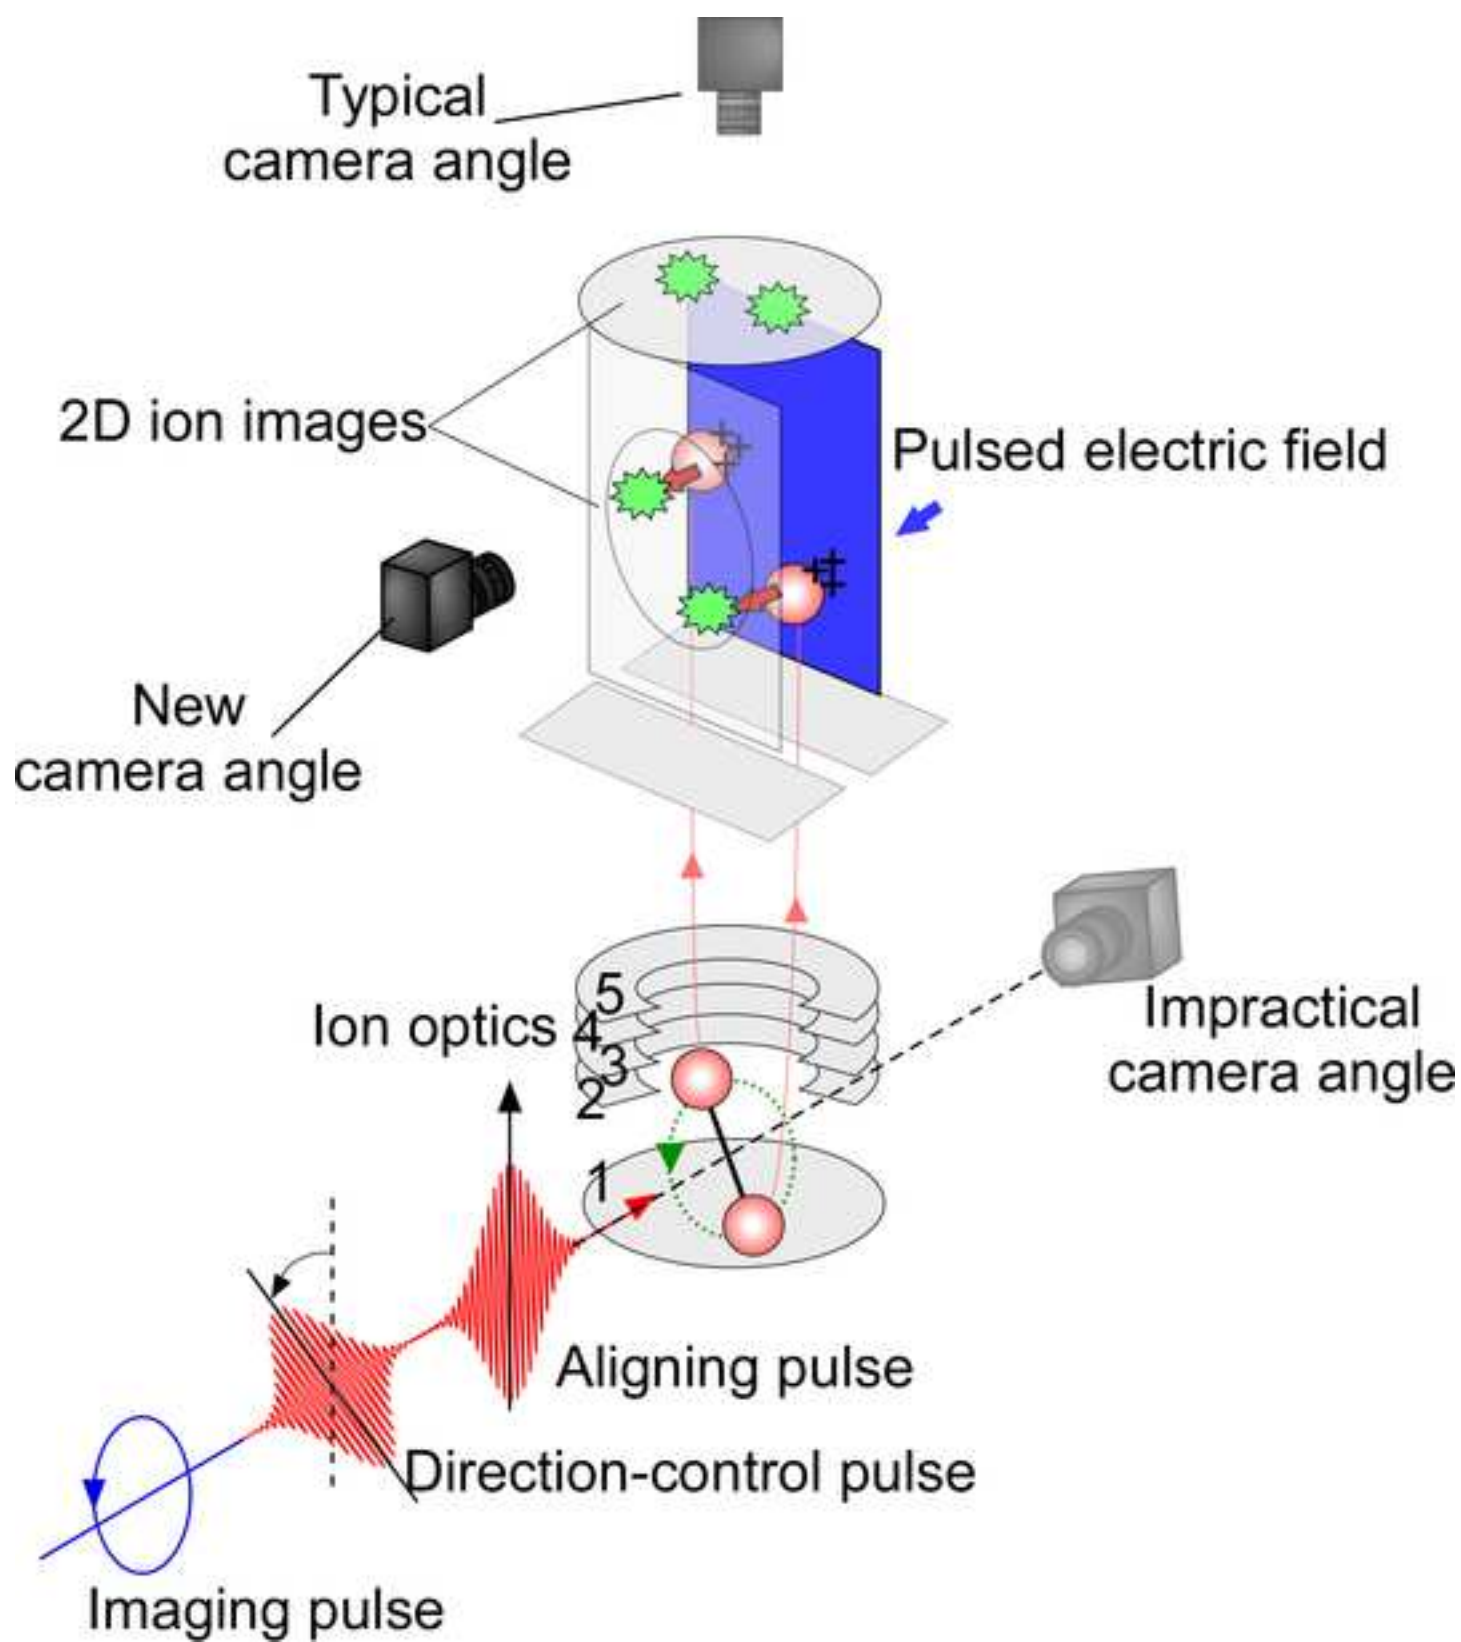

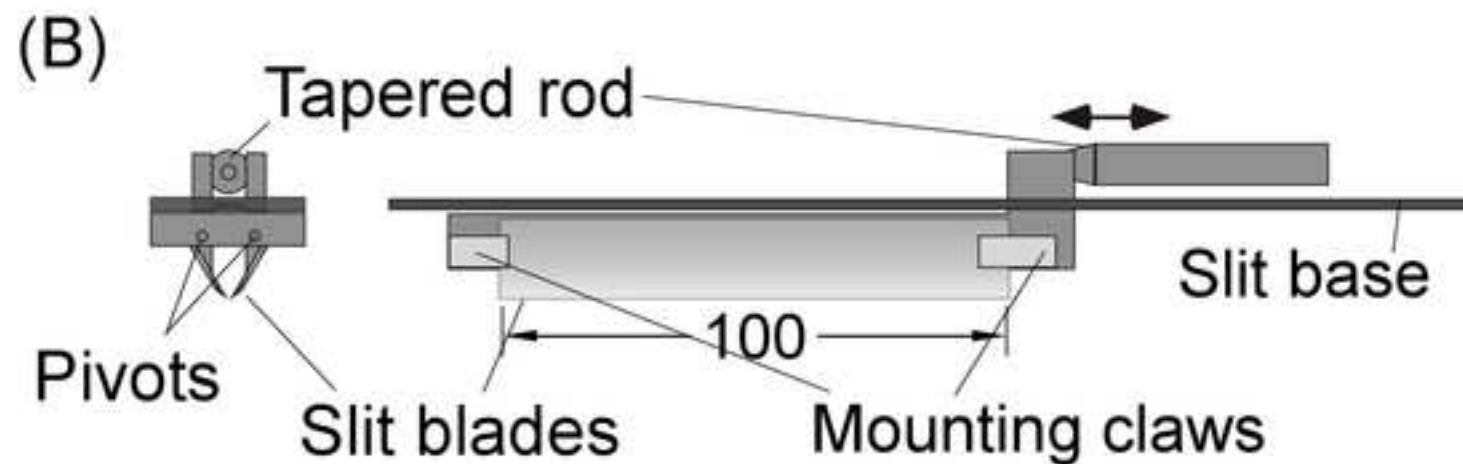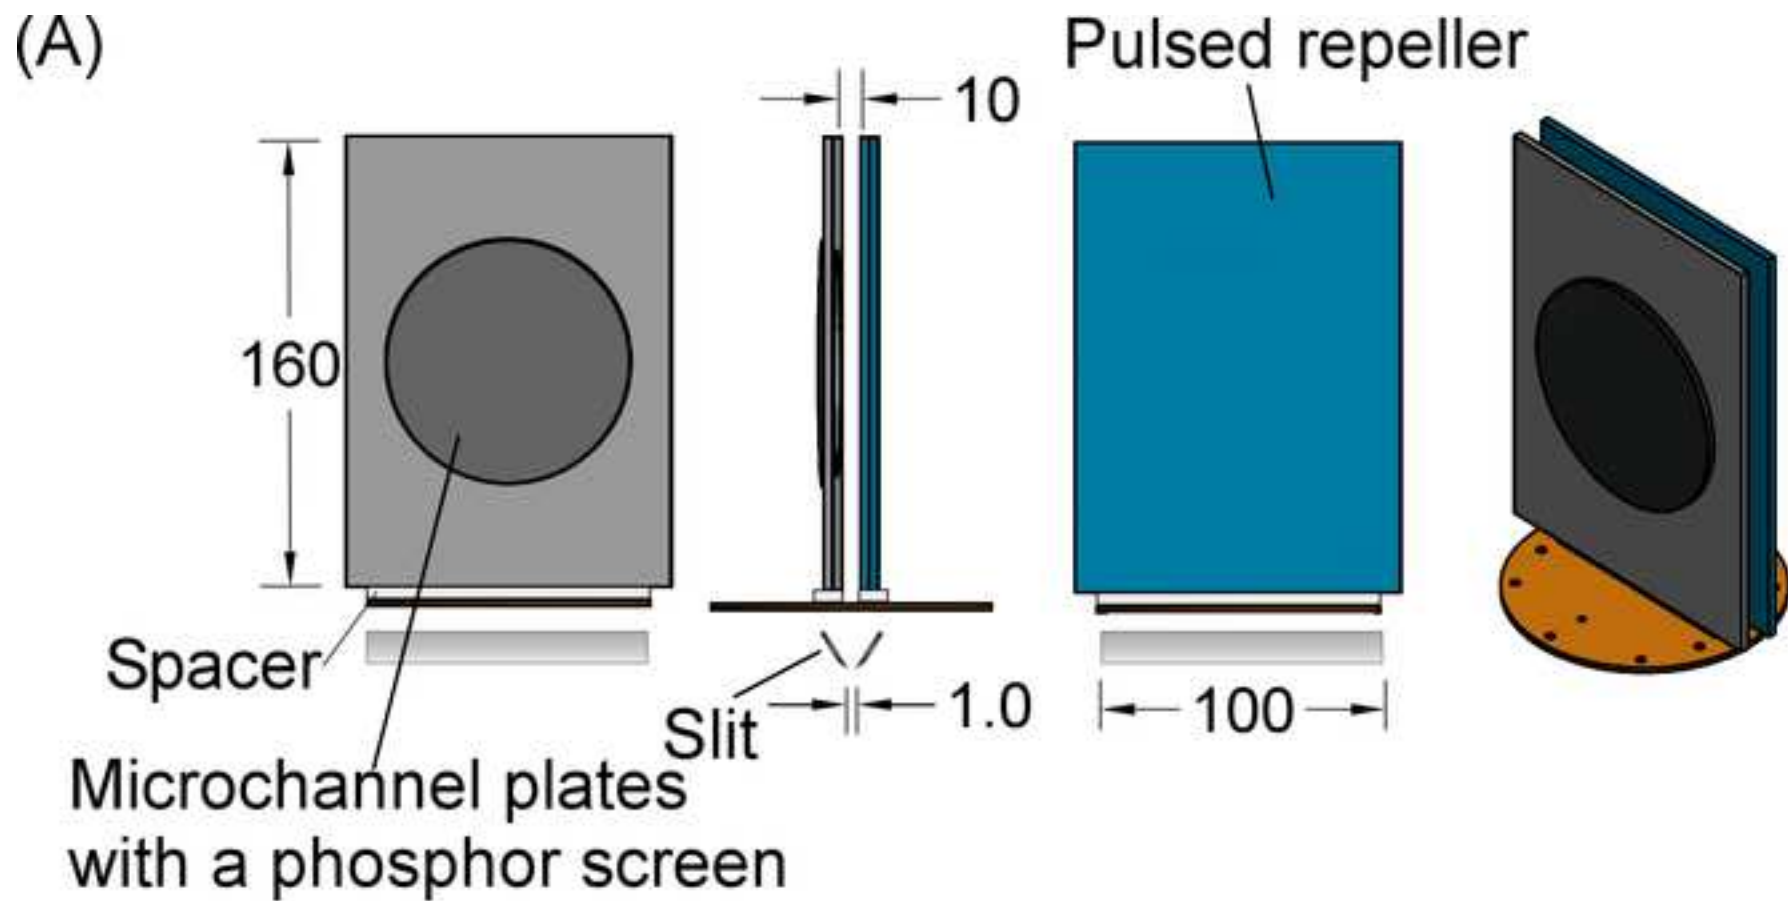


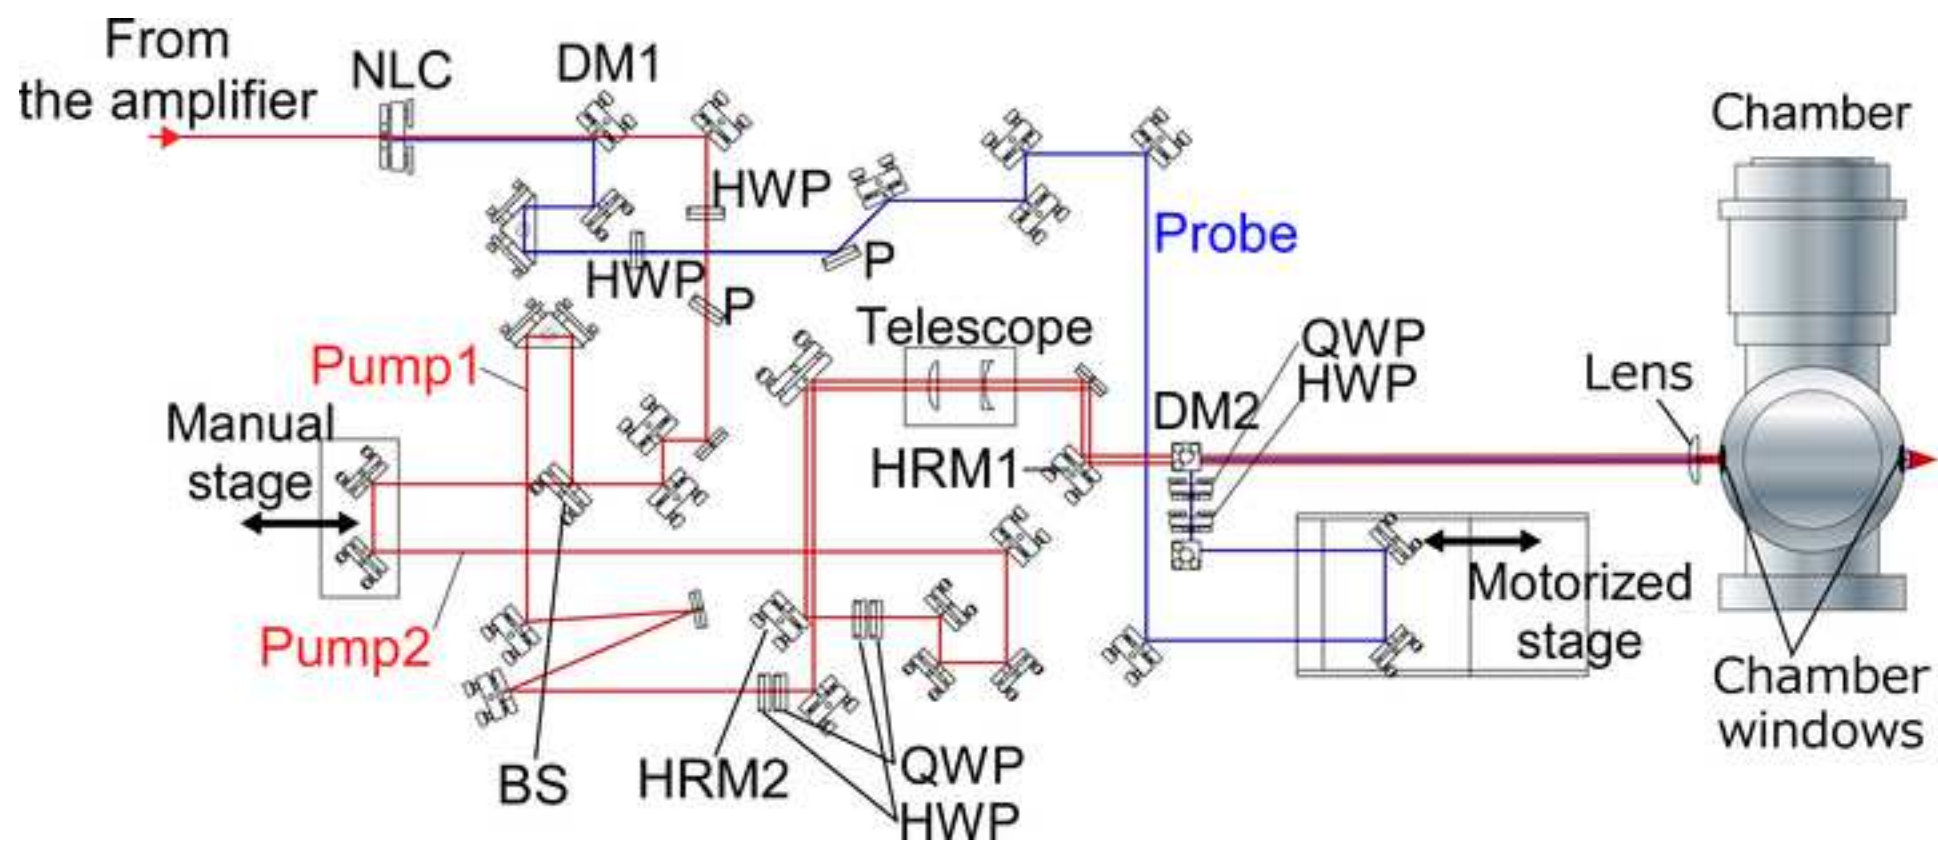

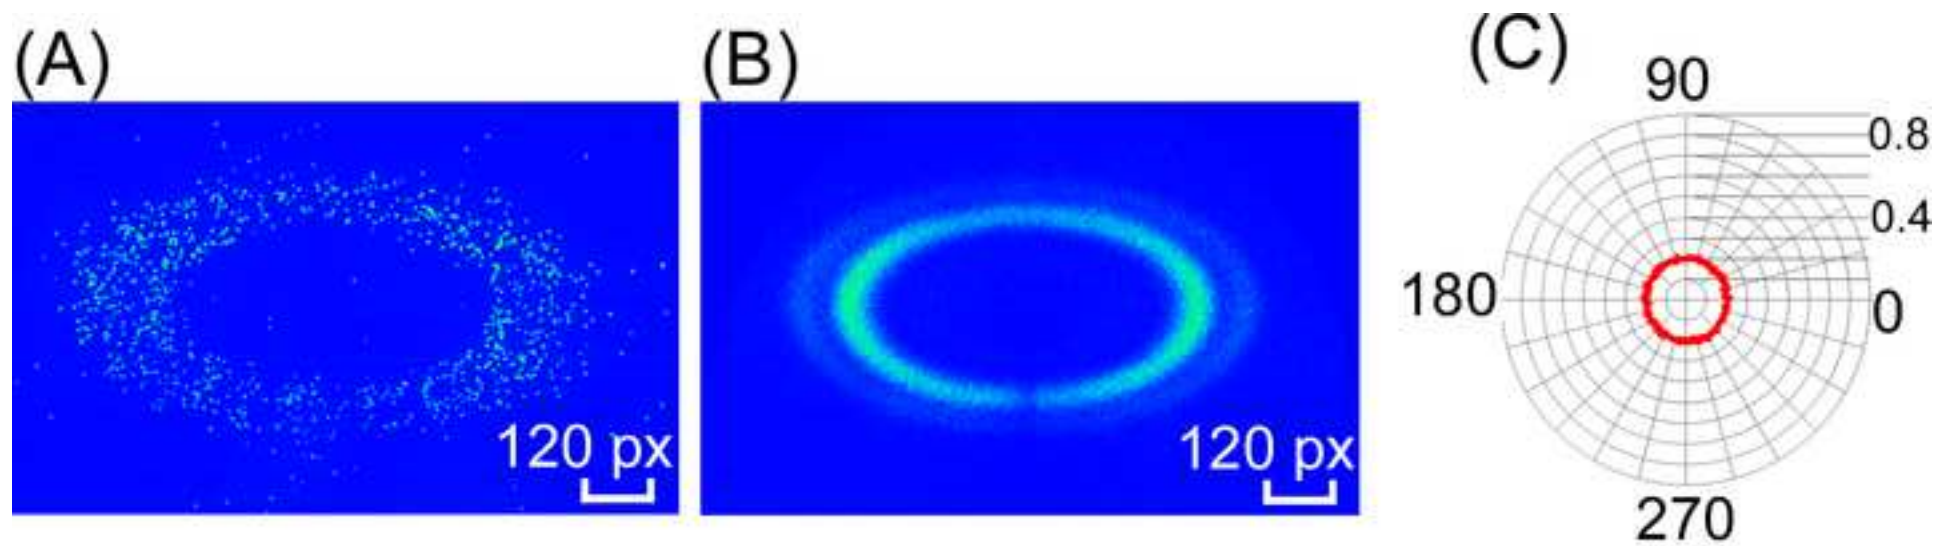


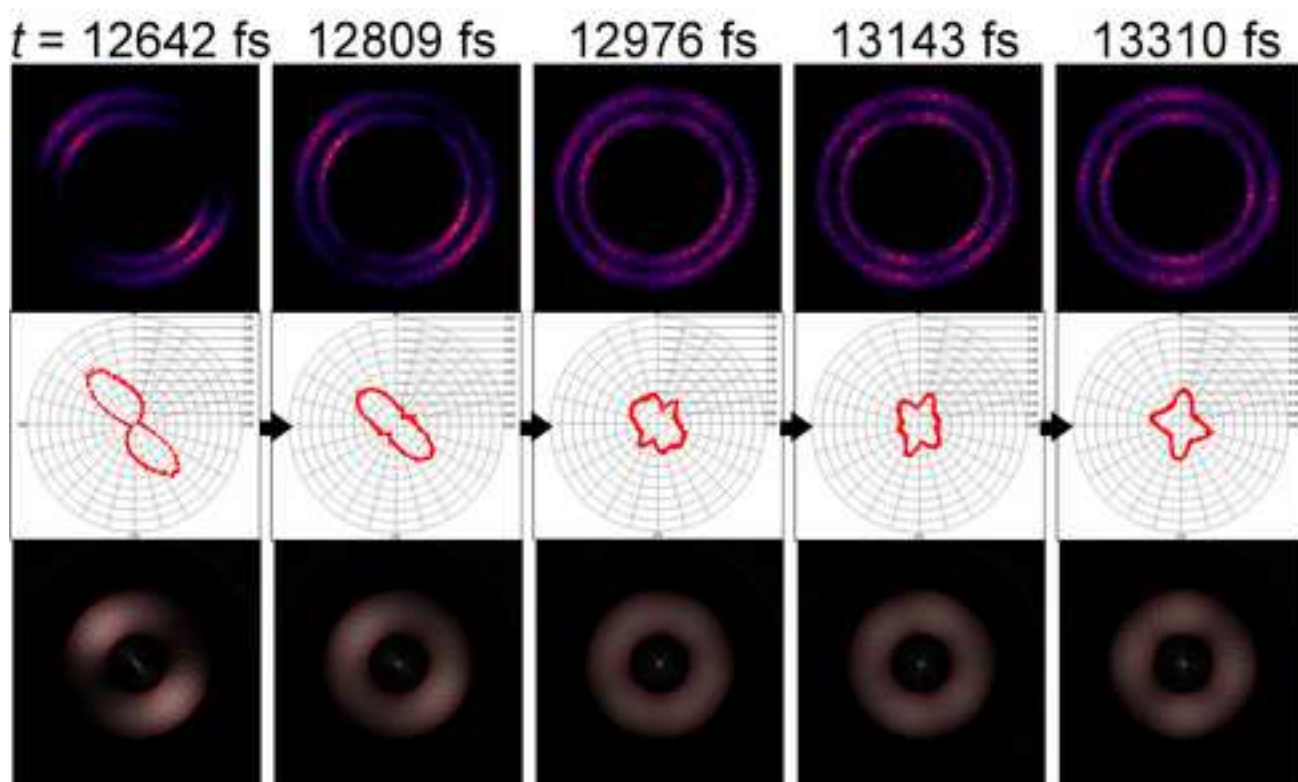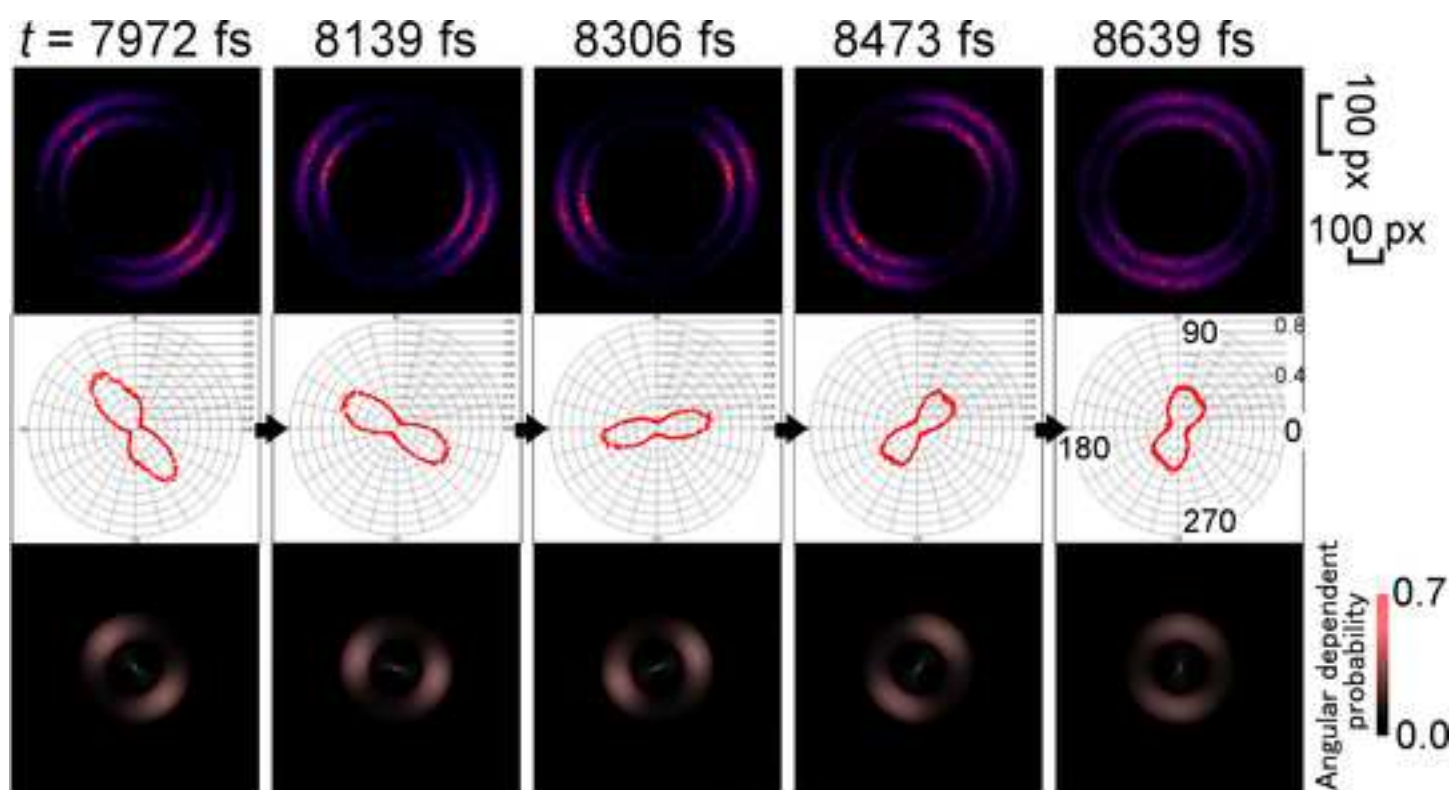


(A)

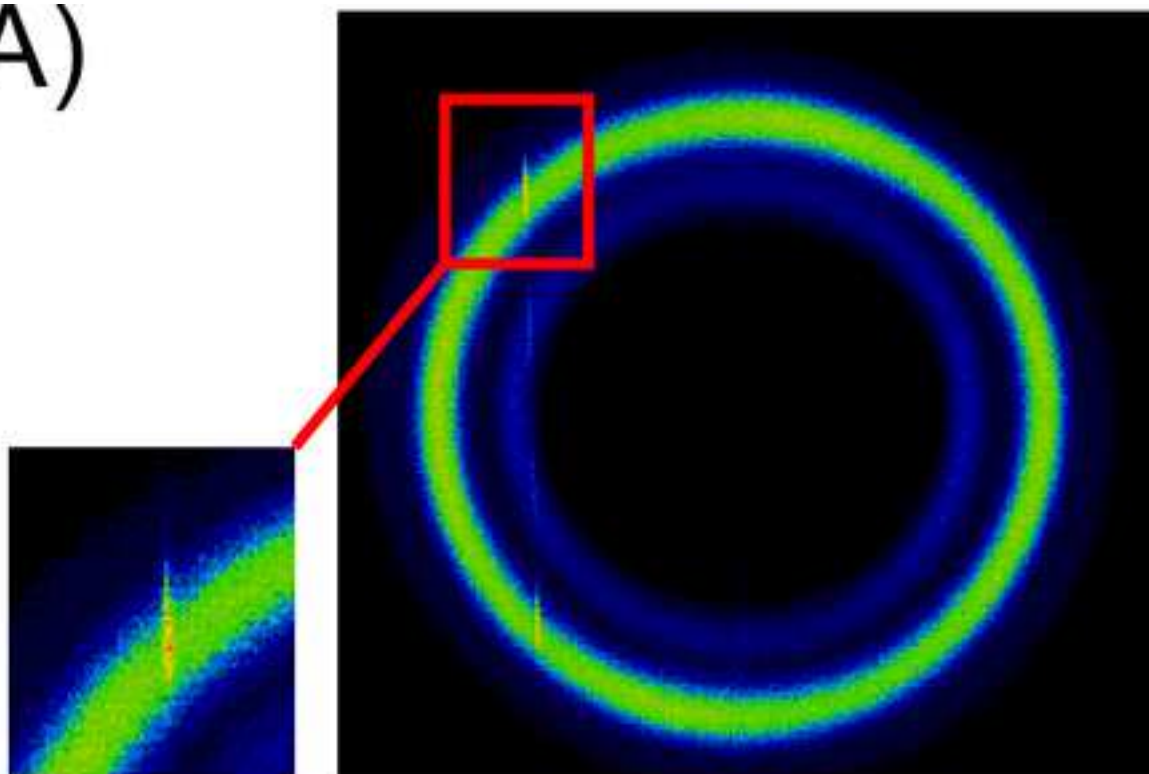

(B)

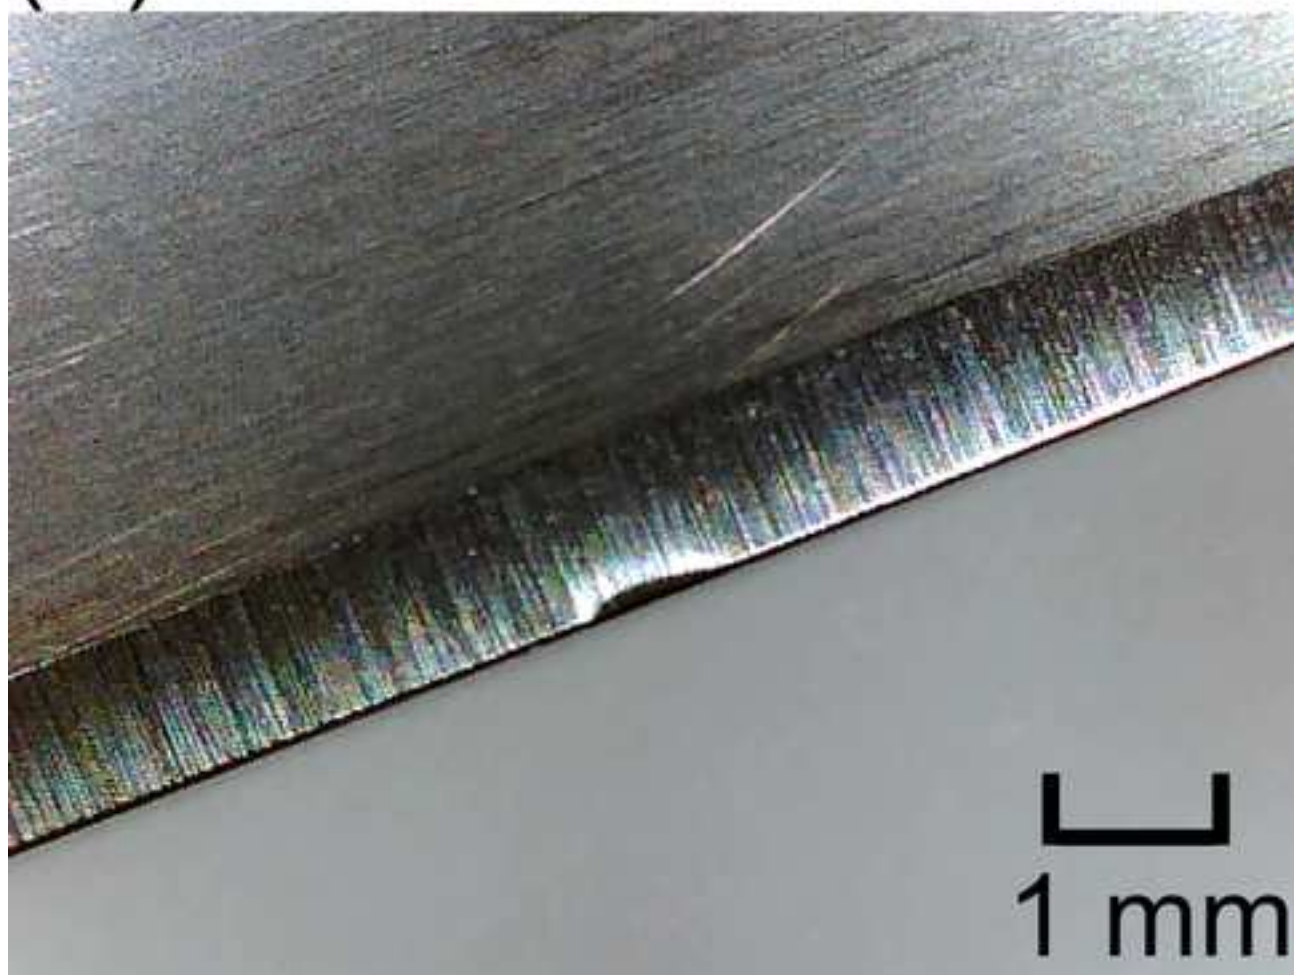


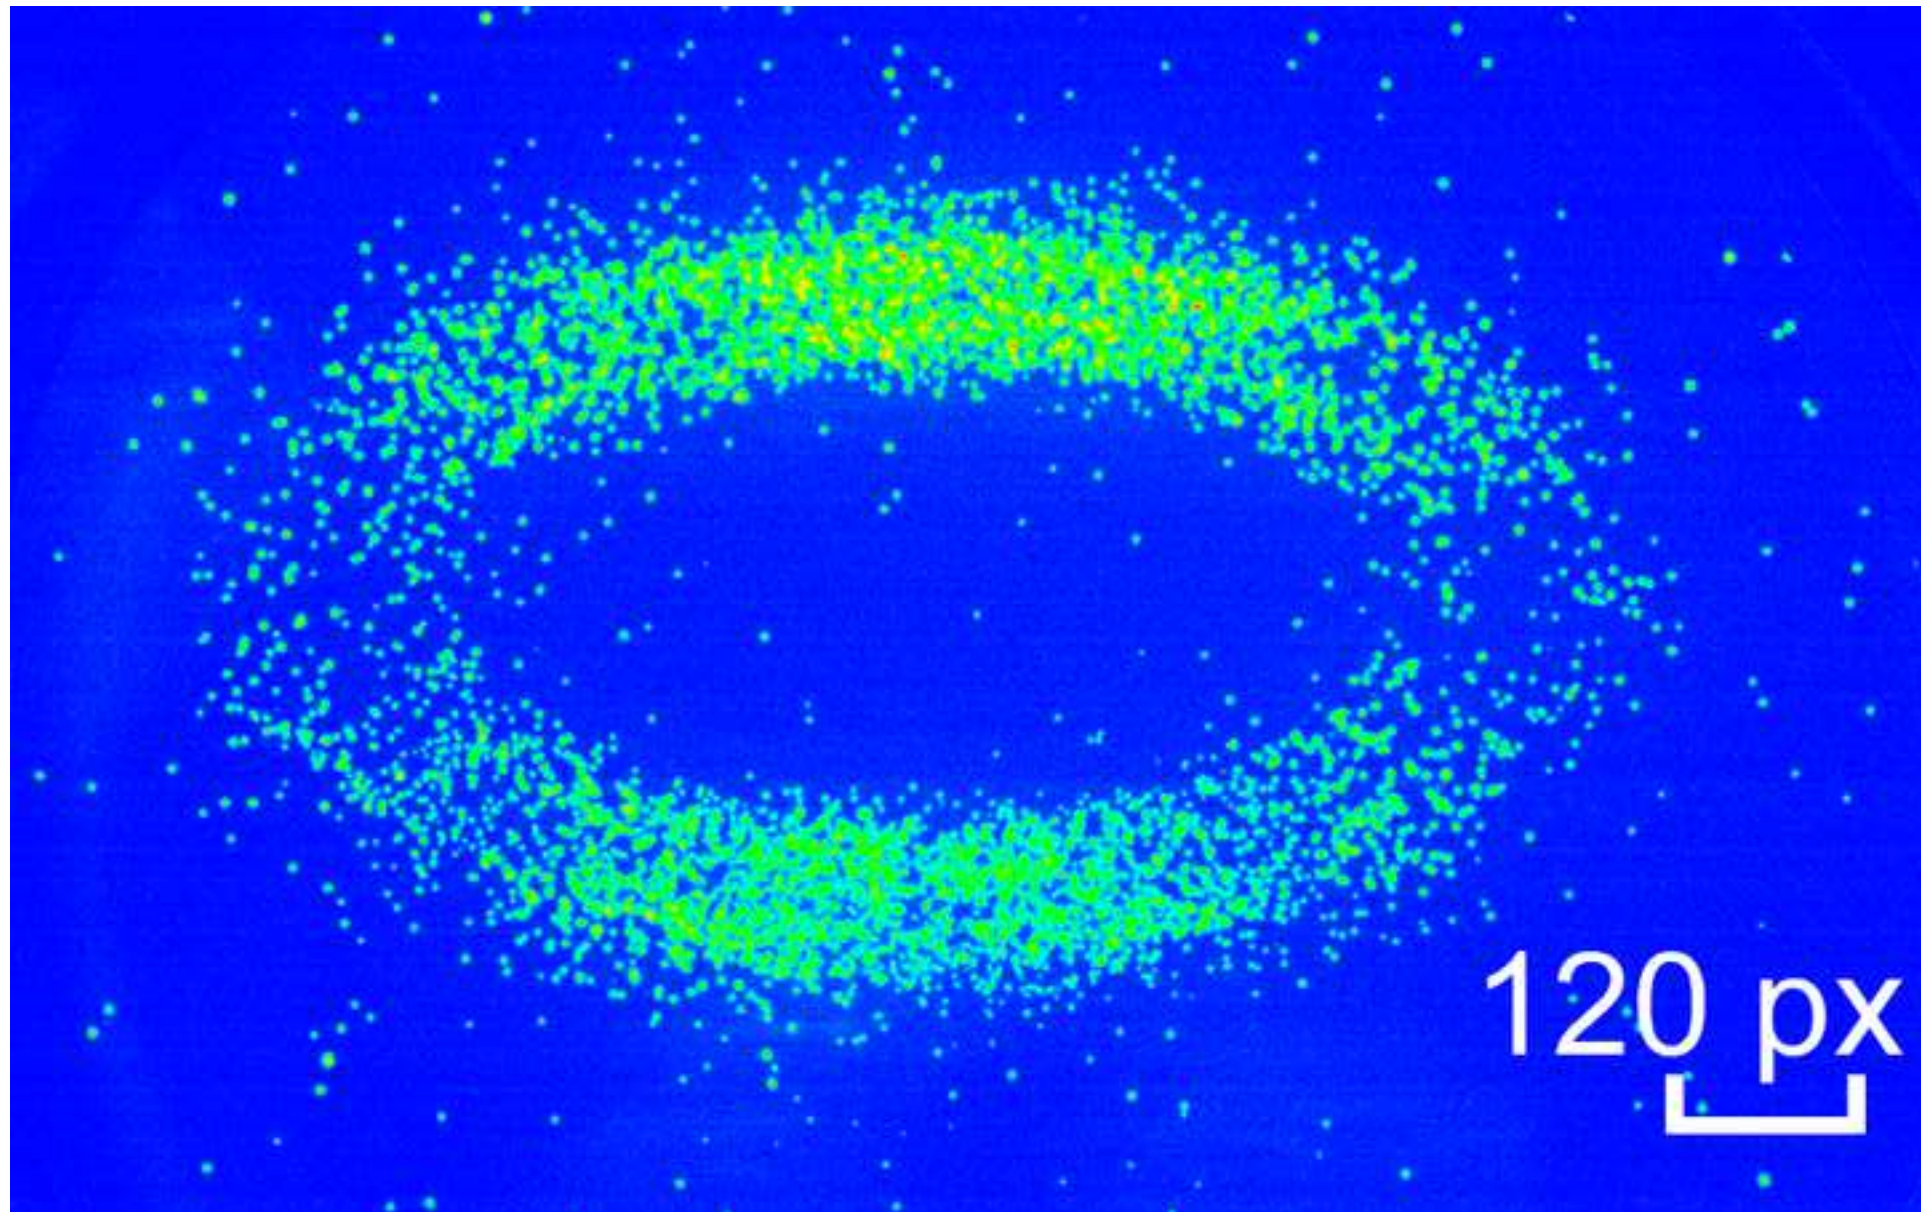

Optical setup

Viewport
Camera


Window

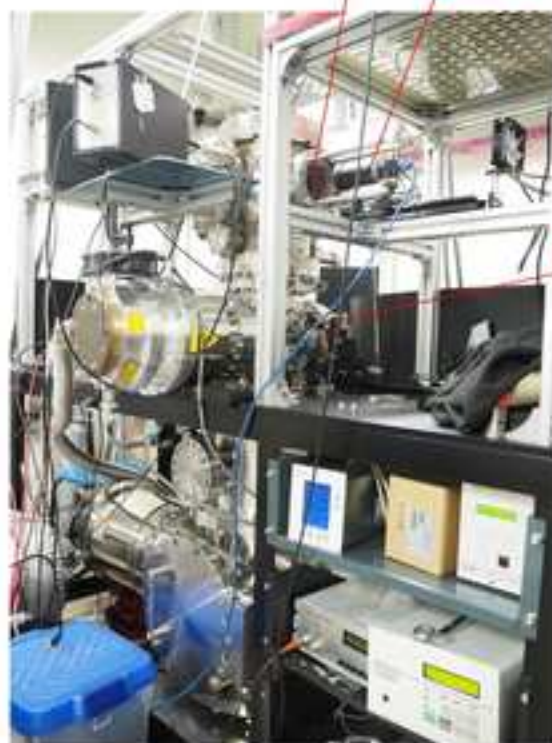

Slit assembly



Detector assembly

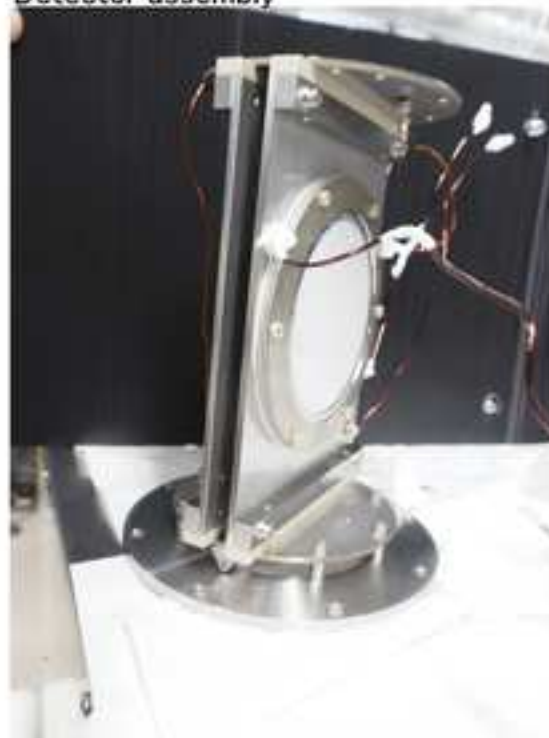

Name of Material/ Equipment	Company	Catalog Number	Comments/Description
CMOS camera	Toshiba TELI	BU-238M-ES	equipped with SONY IMX174 sensor
High voltage switch	Behlke	HTS-41-03-GSM	
High voltage switch	Behlke	HTS-80-03	
Digital delay generator	Stanford research systems	DG535	
Digital delay generator	Stanford research systems	DG645	
Microchannel plate	Photonis	3075	
Pulsed valve	LAMID LTD	Even-Lavie valve	High repetition, room temperature model
Molecular beam skimmers	Institute for Molecular Science	13C11	3 and 1.5 mm center hole, 25 degrees full inner angle, and ~50 mm length
Optical Comparator	Nikon	V-24B	
DPSS laser	Lighthouse Photonics	Sprout	
Femtosecond Ti:Sapphire oscillator	KMLabs	Halcyon	
Femtosecond Ti:Sapphire amplifier	Quantronix	Odin-II HE	
Motorized linear stage	Sigma Koki	KST(GS)-100X	
Manual X-stage	Sigma Koki	TSD-601S	
High resolution mirror mount	Newport	Suprema SX100-F2KN-254	
High resolution mirror mount	LIOP-TEC GmbH	SR100-100R-2-HS	
Polarization checker	Paradigm Devices, Inc.	O-tool VIS	
Instrument communication interface	National Instruments	NI-MAX	
Graphical development environment for measurement programs	National Instruments	LabVIEW 2014	
Laser line dielectric mirror	CVI/LEO	TLM2-400/800-45UNP	
Laser line dielectric mirror	Altechna	Low GDD Ultrafast mirror	
Laser line dielectric mirror	Altechna	Low GDD Ultrafast mirror	
Femtosecond polarizer	Advanced Thin Films	PBS-GVD	



1 Alewife Center #200
Cambridge, MA 02140
tel: 617 945 9051
www.jove.com

ARTICLE AND VIDEO LICENSE AGREEMENT

Title of Article: Direct Imaging of Laser-driven Ultrafast Molecular Rotation
Author(s): Kenta Mizuse, Romu Fujimoto, Nobuo Mizutani, and Yasuhiro Ohshima

Item 1 (check one box): The Author elects to have the Materials be made available (as described at <http://www.jove.com/publish>) via: ☒ Standard Access ☐ Open Access

Item 2 (check one box):

- ☒ The Author is NOT a United States government employee.
☐ The Author is a United States government employee and the Materials were prepared in the course of his or her duties as a United States government employee.
☐ The Author is a United States government employee but the Materials were NOT prepared in the course of his or her duties as a United States government employee.

ARTICLE AND VIDEO LICENSE AGREEMENT

1. **Defined Terms.** As used in this Article and Video License Agreement, the following terms shall have the following meanings: “**Agreement**” means this Article and Video License Agreement; “**Article**” means the article specified on the last page of this Agreement, including any associated materials such as texts, figures, tables, artwork, abstracts, or summaries contained therein; “**Author**” means the author who is a signatory to this Agreement; “**Collective Work**” means a work, such as a periodical issue, anthology or encyclopedia, in which the Materials in their entirety in unmodified form, along with a number of other contributions, constituting separate and independent works in themselves, are assembled into a collective whole; “**CRC License**” means the Creative Commons Attribution-Non Commercial-No Derivs 3.0 Unported Agreement, the terms and conditions of which can be found at: <http://creativecommons.org/licenses/by-nc-nd/3.0/legalcode>; “**Derivative Work**” means a work based upon the Materials or upon the Materials and other pre-existing works, such as a translation, musical arrangement, dramatization, fictionalization, motion picture version, sound recording, art reproduction, abridgment, condensation, or any other form in which the Materials may be recast, transformed, or adapted; “**Institution**” means the institution, listed on the last page of this Agreement, by which the Author was employed at the time of the creation of the Materials; “**JoVE**” means MyJoVE Corporation, a Massachusetts corporation and the publisher of *The Journal of Visualized Experiments*; “**Materials**” means the Article and / or the Video; “**Parties**” means the Author and JoVE; “**Video**” means any video(s) made by the Author, alone or in conjunction with any other parties, or by JoVE or its affiliates or agents, individually or in collaboration with the Author or any other parties, incorporating all or any portion of the Article, and in which the Author may or may not appear.

2. **Background.** The Author, who is the author of the Article, in order to ensure the dissemination and protection of the Article, desires to have the JoVE publish the Article and create and transmit videos based on the Article. In furtherance of such goals, the Parties desire to memorialize in this Agreement the respective rights of each Party in and to the Article and the Video.

3. **Grant of Rights in Article.** In consideration of JoVE agreeing to publish the Article, the Author hereby grants to JoVE, subject to **Sections 4 and 7** below, the exclusive, royalty-free, perpetual (for the full term of copyright in the Article, including any extensions thereto) license (a) to publish, reproduce, distribute, display and store the Article in all forms, formats and media whether now known or hereafter developed (including without limitation in print, digital and electronic form) throughout the world, (b) to translate the Article into other languages, create adaptations, summaries or extracts of the Article or other Derivative Works (including, without limitation, the Video) or Collective Works based on all or any portion of the Article and exercise all of the rights set forth in (a) above in such translations, adaptations, summaries, extracts, Derivative Works or Collective Works and (c) to license others to do any or all of the above. The foregoing rights may be exercised in all media and formats, whether now known or hereafter devised, and include the right to make such modifications as are technically necessary to exercise the rights in other media and formats. If the “Open Access” box has been checked in **Item 1** above, JoVE and the Author hereby grant to the public all such rights in the Article as provided in, but subject to all limitations and requirements set forth in, the CRC License.

ARTICLE AND VIDEO LICENSE AGREEMENT

4. Retention of Rights in Article. Notwithstanding the exclusive license granted to JoVE in **Section 3** above, the Author shall, with respect to the Article, retain the non-exclusive right to use all or part of the Article for the non-commercial purpose of giving lectures, presentations or teaching classes, and to post a copy of the Article on the Institution's website or the Author's personal website, in each case provided that a link to the Article on the JoVE website is provided and notice of JoVE's copyright in the Article is included. All non-copyright intellectual property rights in and to the Article, such as patent rights, shall remain with the Author.

5. Grant of Rights in Video – Standard Access. This **Section 5** applies if the "Standard Access" box has been checked in **Item 1** above or if no box has been checked in **Item 1** above. In consideration of JoVE agreeing to produce, display or otherwise assist with the Video, the Author hereby acknowledges and agrees that, Subject to **Section 7** below, JoVE is and shall be the sole and exclusive owner of all rights of any nature, including, without limitation, all copyrights, in and to the Video. To the extent that, by law, the Author is deemed, now or at any time in the future, to have any rights of any nature in or to the Video, the Author hereby disclaims all such rights and transfers all such rights to JoVE.

6. Grant of Rights in Video – Open Access. This **Section 6** applies only if the "Open Access" box has been checked in **Item 1** above. In consideration of JoVE agreeing to produce, display or otherwise assist with the Video, the Author hereby grants to JoVE, subject to **Section 7** below, the exclusive, royalty-free, perpetual (for the full term of copyright in the Article, including any extensions thereto) license (a) to publish, reproduce, distribute, display and store the Video in all forms, formats and media whether now known or hereafter developed (including without limitation in print, digital and electronic form) throughout the world, (b) to translate the Video into other languages, create adaptations, summaries or extracts of the Video or other Derivative Works or Collective Works based on all or any portion of the Video and exercise all of the rights set forth in (a) above in such translations, adaptations, summaries, extracts, Derivative Works or Collective Works and (c) to license others to do any or all of the above. The foregoing rights may be exercised in all media and formats, whether now known or hereafter devised, and include the right to make such modifications as are technically necessary to exercise the rights in other media and formats. For any Video to which this **Section 6** is applicable, JoVE and the Author hereby grant to the public all such rights in the Video as provided in, but subject to all limitations and requirements set forth in, the CRC License.

7. Government Employees. If the Author is a United States government employee and the Article was prepared in the course of his or her duties as a United States government employee, as indicated in **Item 2** above, and any of the licenses or grants granted by the Author hereunder exceed the scope of the 17 U.S.C. 403, then the rights granted hereunder shall be limited to the maximum rights permitted under such

statute. In such case, all provisions contained herein that are not in conflict with such statute shall remain in full force and effect, and all provisions contained herein that do so conflict shall be deemed to be amended so as to provide to JoVE the maximum rights permissible within such statute.

8. Likeness, Privacy, Personality. The Author hereby grants JoVE the right to use the Author's name, voice, likeness, picture, photograph, image, biography and performance in any way, commercial or otherwise, in connection with the Materials and the sale, promotion and distribution thereof. The Author hereby waives any and all rights he or she may have, relating to his or her appearance in the Video or otherwise relating to the Materials, under all applicable privacy, likeness, personality or similar laws.

9. Author Warranties. The Author represents and warrants that the Article is original, that it has not been published, that the copyright interest is owned by the Author (or, if more than one author is listed at the beginning of this Agreement, by such authors collectively) and has not been assigned, licensed, or otherwise transferred to any other party. The Author represents and warrants that the author(s) listed at the top of this Agreement are the only authors of the Materials. If more than one author is listed at the top of this Agreement and if any such author has not entered into a separate Article and Video License Agreement with JoVE relating to the Materials, the Author represents and warrants that the Author has been authorized by each of the other such authors to execute this Agreement on his or her behalf and to bind him or her with respect to the terms of this Agreement as if each of them had been a party hereto as an Author. The Author warrants that the use, reproduction, distribution, public or private performance or display, and/or modification of all or any portion of the Materials does not and will not violate, infringe and/or misappropriate the patent, trademark, intellectual property or other rights of any third party. The Author represents and warrants that it has and will continue to comply with all government, institutional and other regulations, including, without limitation all institutional, laboratory, hospital, ethical, human and animal treatment, privacy, and all other rules, regulations, laws, procedures or guidelines, applicable to the Materials, and that all research involving human and animal subjects has been approved by the Author's relevant institutional review board.

10. JoVE Discretion. If the Author requests the assistance of JoVE in producing the Video in the Author's facility, the Author shall ensure that the presence of JoVE employees, agents or independent contractors is in accordance with the relevant regulations of the Author's institution. If more than one author is listed at the beginning of this Agreement, JoVE may, in its sole discretion, elect not take any action with respect to the Article until such time as it has received complete, executed Article and Video License Agreements from each such author. JoVE reserves the right, in its absolute and sole discretion and without giving any reason therefore, to accept or decline any work submitted to JoVE. JoVE and its employees, agents and independent contractors shall have

ARTICLE AND VIDEO LICENSE AGREEMENT

full, unfettered access to the facilities of the Author or of the Author's institution as necessary to make the Video, whether actually published or not. JoVE has sole discretion as to the method of making and publishing the Materials, including, without limitation, to all decisions regarding editing, lighting, filming, timing of publication, if any, length, quality, content and the like.

11. Indemnification. The Author agrees to indemnify JoVE and/or its successors and assigns from and against any and all claims, costs, and expenses, including attorney's fees, arising out of any breach of any warranty or other representations contained herein. The Author further agrees to indemnify and hold harmless JoVE from and against any and all claims, costs, and expenses, including attorney's fees, resulting from the breach by the Author of any representation or warranty contained herein or from allegations or instances of violation of intellectual property rights, damage to the Author's or the Author's institution's facilities, fraud, libel, defamation, research, equipment, experiments, property damage, personal injury, violations of institutional, laboratory, hospital, ethical, human and animal treatment, privacy or other rules, regulations, laws, procedures or guidelines, liabilities and other losses or damages related in any way to the submission of work to JoVE, making of videos by JoVE, or publication in JoVE or elsewhere by JoVE. The Author shall be responsible for, and shall hold JoVE harmless from, damages caused by lack of sterilization, lack of cleanliness or by contamination due to the making of a video by JoVE its employees, agents or independent contractors. All sterilization, cleanliness or decontamination procedures shall be solely the responsibility of the Author and shall be undertaken at the Author's

expense. All indemnifications provided herein shall include JoVE's attorney's fees and costs related to said losses or damages. Such indemnification and holding harmless shall include such losses or damages incurred by, or in connection with, acts or omissions of JoVE, its employees, agents or independent contractors.

12. Fees. To cover the cost incurred for publication, JoVE must receive payment before production and publication the Materials. Payment is due in 21 days of invoice. Should the Materials not be published due to an editorial or production decision, these funds will be returned to the Author. Withdrawal by the Author of any submitted Materials after final peer review approval will result in a US\$1,200 fee to cover pre-production expenses incurred by JoVE. If payment is not received by the completion of filming, production and publication of the Materials will be suspended until payment is received.

13. Transfer, Governing Law. This Agreement may be assigned by JoVE and shall inure to the benefits of any of JoVE's successors and assignees. This Agreement shall be governed and construed by the internal laws of the Commonwealth of Massachusetts without giving effect to any conflict of law provision thereunder. This Agreement may be executed in counterparts, each of which shall be deemed an original, but all of which together shall be deemed to be one and the same agreement. A signed copy of this Agreement delivered by facsimile, e-mail or other means of electronic transmission shall be deemed to have the same legal effect as delivery of an original signed copy of this Agreement.

A signed copy of this document must be sent with all new submissions. Only one Agreement required per submission.

CORRESPONDING AUTHOR:

Name:

Kenta Mizuse

Department:

Chemistry

Institution:

Tokyo Institute of Technology

Article Title:

Direct Imaging of Laser-driven Ultrafast Molecular Rotation

Signature:

水瀬 健太

Date:

April 28, 2016

Please submit a signed and dated copy of this license by one of the following three methods:

- 1) Upload a scanned copy of the document as a pdf on the JoVE submission site;
- 2) Fax the document to +1.866.381.2236;
- 3) Mail the document to JoVE / Attn: JoVE Editorial / 1 Alewife Center #200 / Cambridge, MA 02139

For questions, please email submissions@jove.com or call +1.617.945.9051



Tokyo Institute of Technology

Department of Chemistry, School of Science

Tokyo, 152-8550, Japan

Sep. 7, 2016

Dear Dr. Jaydev Upponi and Dr. Benjamin Werth
Editors of the Journal of Visualized Experiments

Thank you for the reply and editorial comments on our manuscript,
JoVE54917 "Direct Imaging of Laser-driven Ultrafast Molecular Rotation".

Following Editorial and reviewer's comments, we have modified the manuscript.
The followings are the replies to the comments.

Because both reviewers recognize the novelty of the present method, and the Review 1 agree to the submission to JoVE after the minor revision, we hope the present version satisfy the standard of JoVE publication.

Editorial comments:

•Many errors in English remain in the manuscript. Additional editing is required prior to acceptance, should be performed by a Native English speaker. Some specific errors are noted below:

- Line 60 – “of motions of interests”
- Line 77 – “motionusing”
- Line 78 – “have led” – should be “has”
- Line 103 – “seriously low” – “Seriously” is the wrong word
- Line 124, 213, 295, 740 – “equipments” or “equipment’s”
- 1.5.7 – “a standard mounting procedures”
- 2.2.2 – “passthrough”
- 2.4.2 – “polarizedsecond”
- 2.5 – “each pulses”

We are sorry for the typo and some errors due to the unexpected work of Word program. We have carefully checked the manuscript, and all the above mentioned errors have been fixed.

- Additional detail is required:

-2.3.1 – How are the pulses obtained? Is there a particular readout to watch? Is a laser turned on? Please describe for filming.

New NOTE was added to clarify the origin of the pulse.

-2.3.2 –How are they aligned parallel (are some parts of the apparatus adjusted to achieve this)? Please describe what actions are being performed for filming.

A sentence and NOTE which describe the detail were inserted in the 2.3.2.

-2.5.1 note – Please clarify “the purpose of two pumps”.

- Formatting: 2.4.3/2.5 – There is a heading for 2.5 at the end of this step, plus an additional 2.5 heading below it.

Both of them were errors to be deleted. We fixed them.

- Visualization: The protocol is discontinuous. Please highlight 4.2.2 and 4.5.3.2, which appear to be important for success of the protocol. Make sure that all steps required for success of the protocol are highlighted for filming (excepting computational steps).

We highlighted the steps you suggested.

- Results: Please provide scale bars in Figure 5.

The scale bar is in the top-right of the figure. The second column is also scaled in the polar plot. The third cannot be scaled, because they are schematics as indicated in the caption.

- JoVE reference format requires that the DOIs are included, when available, for all references listed in the article. This is helpful for readers to locate the included references and obtain more information. Please note that often DOIs are not listed with PubMed abstracts and as such, may not be properly included when citing directly from PubMed. In these cases, please manually include DOIs in reference information.

DOI info are now included.

Please include a line-by-line response letter to the editorial and reviewer comments along with the resubmission.

Reviewer 1:

>> I especially like the expanded discussion on how the "time zero" of this experiment is achieved

We added detailed NOTE in 2.5.1 to clarify this.

Major Concerns:

1. Other 3D techniques should be cited such as Vallance and co-workers and Li and co-workers in the introduction.

We added all the important reference as recommended.

Minor Concerns:

2. Section 2 - Construction of the optical set-up; it would be helpful to describe the types of optics used (such as are the beamline mirrors all metallic or dichroic high reflectors). Nothing more than a sentence is needed on this.

3. More information regarding the optical set-up could be provided. For example, the NLC (Non-linear Crystal) material + thickness + cut and importantly the conversion efficiency should be added. Additionally, some samples of the laser power along different parts of the beam would also be instructive. Many of these could be simple additions added to Figure 3, or a few extra lines of text.

In section 2, the types of optics and NLC are indicated and some of them are listed in the materials list.xls. Laser pulse energy is shown through the section 2.

4. Do they use any additional pulse control to remove any chirp introduced from the beam line? Or is the pulse pre-chirped for highest power or temporal pulse duration at the experiment?

5. The authors should state their cross correlation of their three beams as this limits the ultimate temporal resolution

The new sentences and NOTE have been added in the 2.5.6 to address the above two comments.

6. What are the rotational levels of N₂ are present in the ensemble in the molecular beam? And what is its rotational period?

We added descriptions for this in 1.8, 4.2.3, and 4.5.4.

7. What causes their laser stability issues? Is it vibrations through the table or thermal effects changing the laser pointing? It is worth mentioning for readers who are interested in building a similar set-up.

Some details on the laser stability are given in the Discussion section.

Reviewer 2:

>>(1) their protocol contains many very detailed instructions, some indeed very important for proper implementation of the technique, but many others completely meaningless,...

>>(2) their protocol provides a detailed description of the methods that they use in the laboratory, but more of than not, fails to describe the reason for a certain action. That makes the protocol more difficult to follow and less useful than it should be. For example, in 1.2 the authors write "Attach the pulsed valve to the chamber partition using four threaded posts (15 cm, diameter 12 mm),...

Most of the suggested points relate to the NOTE added to follow the Editorial comment for previous revisions. We agree with the reviewers comment "but meaningless (and more than likely, wrong) for similar setups that other researchers would put together, unless their setup becomes an exact clone of the setup used by the authors", but we also have to describe details on apparatus in order to clarify what we actually built up. Therefore, we added many comments and NOTES throughout the manuscript to notify the essence of the procedures and meaning of details.

>>In order for the protocol to possibly become such a useful resource, I think it is essential that the authors alter the scope of the protocol, limiting the protocol to the novel aspects of the method that they have developed

Following the editorial policy of JoVE, we think limiting the procedure description is not suitable and then, we just added comment on the specificity of the present manuscript and the notification of the readers who would like to use the present method.

We hope this modified manuscript is satisfactory for the editor and reviewers.

Sincerely,

Kenta Mizuse, Ph.D.

Assistant Professor

Department of Chemistry,

Tokyo Institute of Technology

Yasuhiro Ohshima, Dr.Sc.

Professor

Department of Chemistry,

Tokyo Institute of Technology