

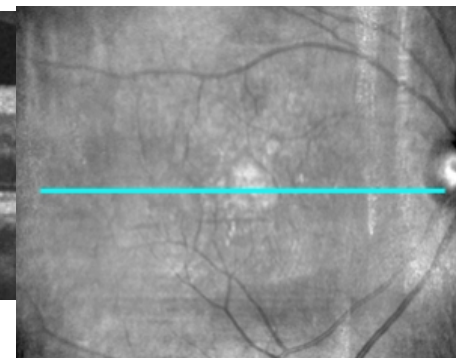



Central Subfield Thickness (μm)	Cube Volume (mm³)	Cube Average Thickness (μm)
181	10.6	295

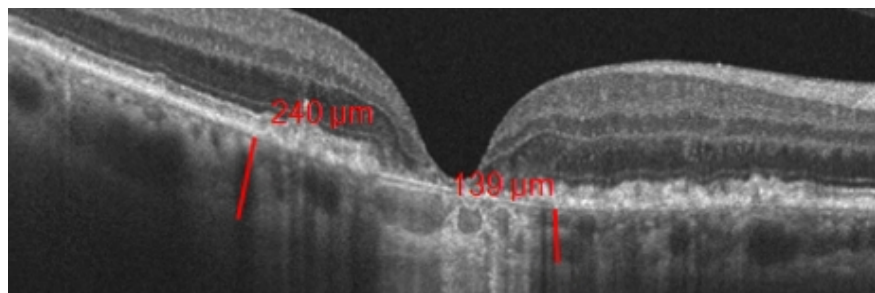

Dry AMD LRRT treated

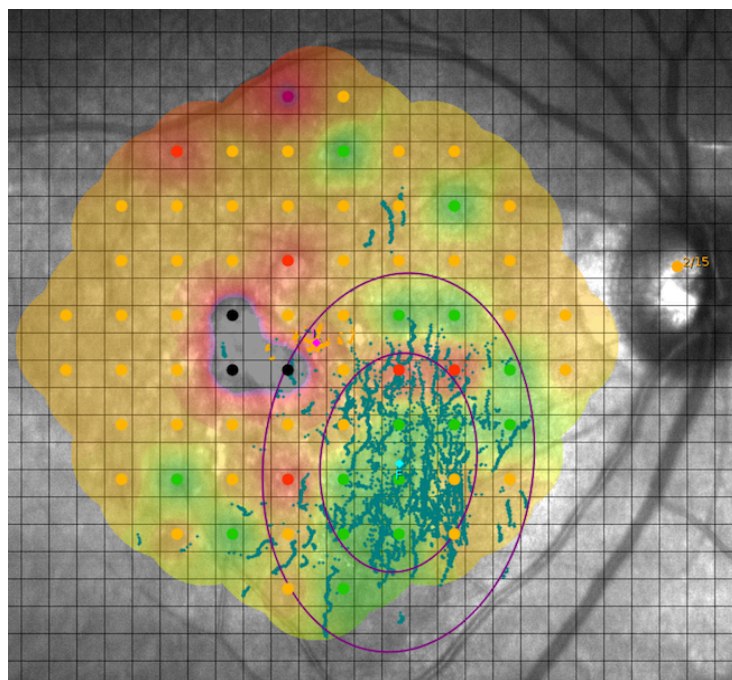

T0 0,222 logMar 12 pts dB 15,4
maxERG 80,97 mV

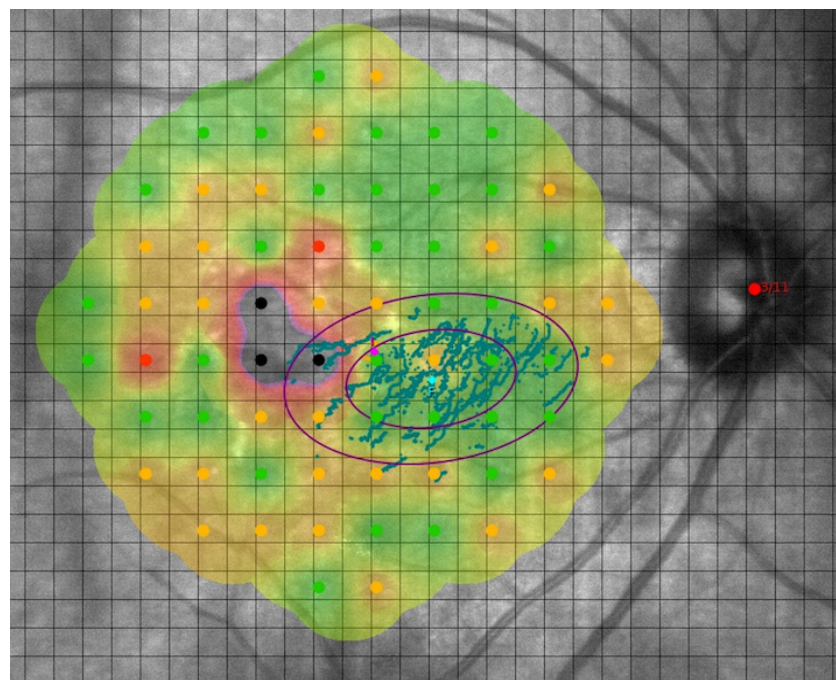

T180 0,097 logMar 9 pts dB 18,8
max ERG 85,87 mV